


Features


- Excellent h_{FE} characteristics
- Low collector saturation voltage

SOT-89

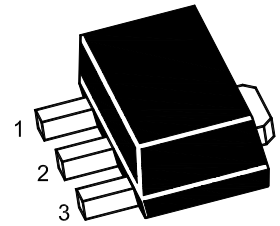

1.Base 2.Collector 3. Emitter

Equivalent Circuit



Marking Code :

2SC3357SQ-A : RH

2SC3357SQ-B : RF

2SC3357SQ-C : RE

2SC3357SQ-D : RG

Absolute Maximum Ratings

Ratings at 25°C ambient temperature unless otherwise specified.







Parameter	Symbol	Value	Unit
Collector Base Voltage	V_{CBO}	20	V
Collector Emitter Voltage	V_{CEO}	12	V
Emitter Base Voltage	V_{EBO}	2.5	V
Collector Current	I_C	0.1	A
Maximum Power Dissipation	P_D	1.2	W
Junction Temperature	T_J	150	°C
Storage Temperature Range	T_{STG}	-65 to +150	°C



Electrical Characteristics (T_A=25°C)

Parameter	Symbol	Min.	Typ.	Max.	Unit
DC Current Gain at V _{CE} = 10 V, I _C = 20 mA Current Gain Group	A	60	--	100	--
	B	90	--	140	
	C	120	--	180	
	D	170	--	250	
Collector Base Cutoff Current at V _{CB} = 10 V	I _{CBO}	--	--	100	nA
Emitter Base Cutoff Current at V _{EB} = 1 V	I _{EBO}	--	--	100	nA
Collector Base Breakdown Voltage at I _C = 1 μA	V _{(BR)CBO}	20	--	--	V
Collector Emitter Breakdown Voltage at I _C = 100 μA	V _{(BR)CEO}	12	--	--	V
Transition Frequency at V _{CE} = 10 V, I _C = 20 mA	F _T	--	6.5	--	GHz
Feed-Back Capacitance at V _{CB} = 10 V, I _E = 0, f = 1MHz	C _{re}	--	0.65	--	pF

Typical Characteristic Curves

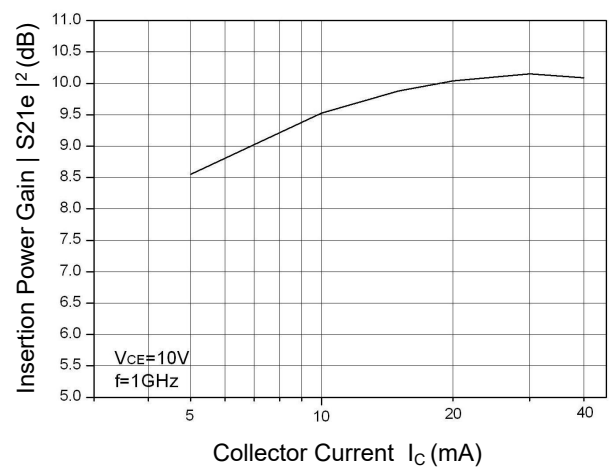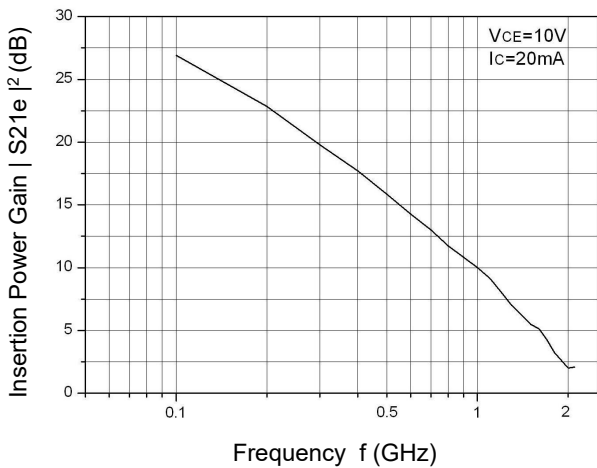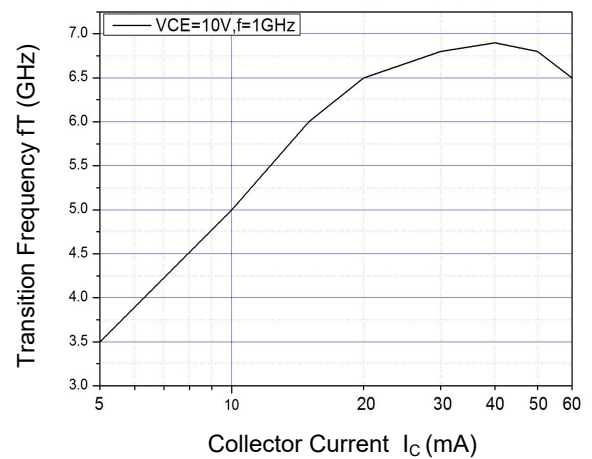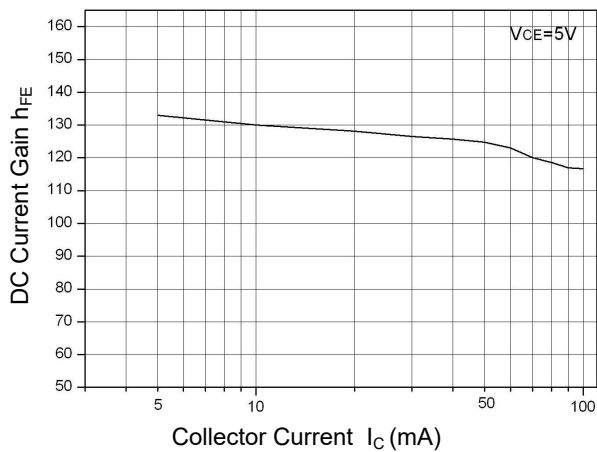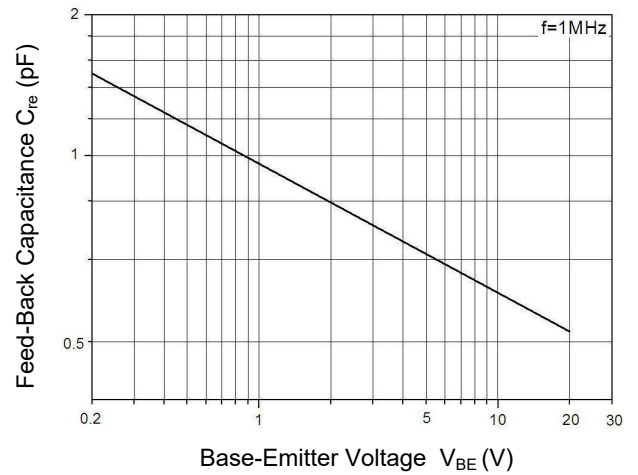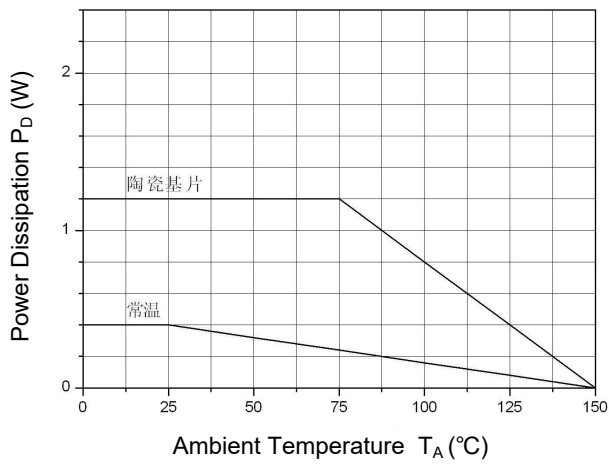

Package Outline

SOT-89

Dimensions in mm




Ordering Information

Device	Package	Shipping
2SC3357SQ	SOT-89	1,000PCS/Reel&7inches
		3,000PCS/Reel&13inches

Conditions of Soldering and Storage

◆ Recommended condition of reflow soldering

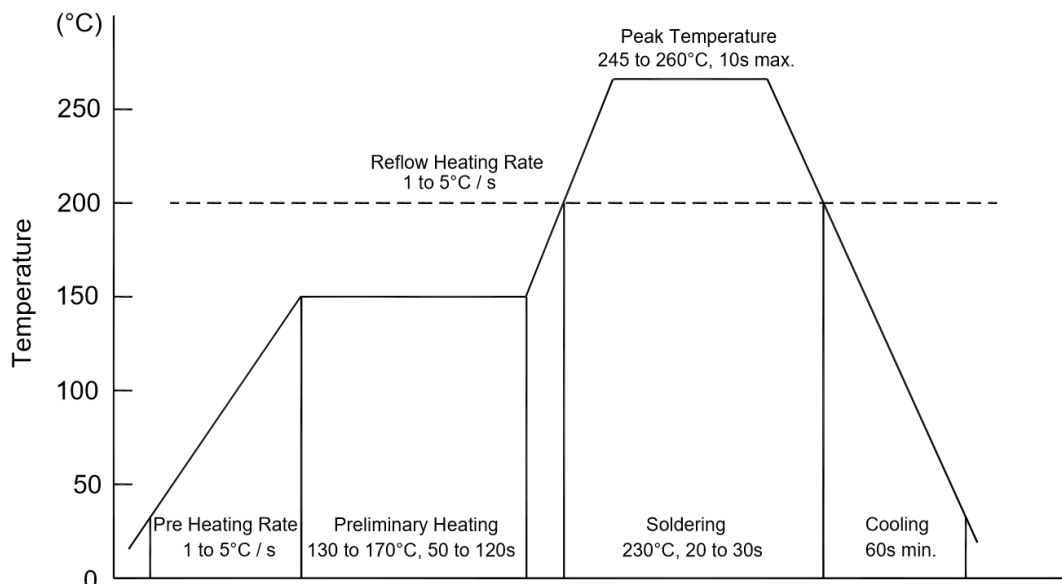

Recommended peak temperature is over 245 °C. If peak temperature is below 245 °C, you may adjust the following parameters:

- Time length of peak temperature (longer)
- Time length of soldering (longer)
- Thickness of solder paste (thicker)

◆ Conditions of hand soldering


- Temperature: 370 °C
- Time: 3s max.
- Times: one time

◆ Storage conditions


- **Temperature**
5 to 40 °C
- **Humidity**
30 to 80% RH
- **Recommended period**
One year after manufacturing

Package Specifications


- The method of packaging (1,000PCS/Reel&7inches)

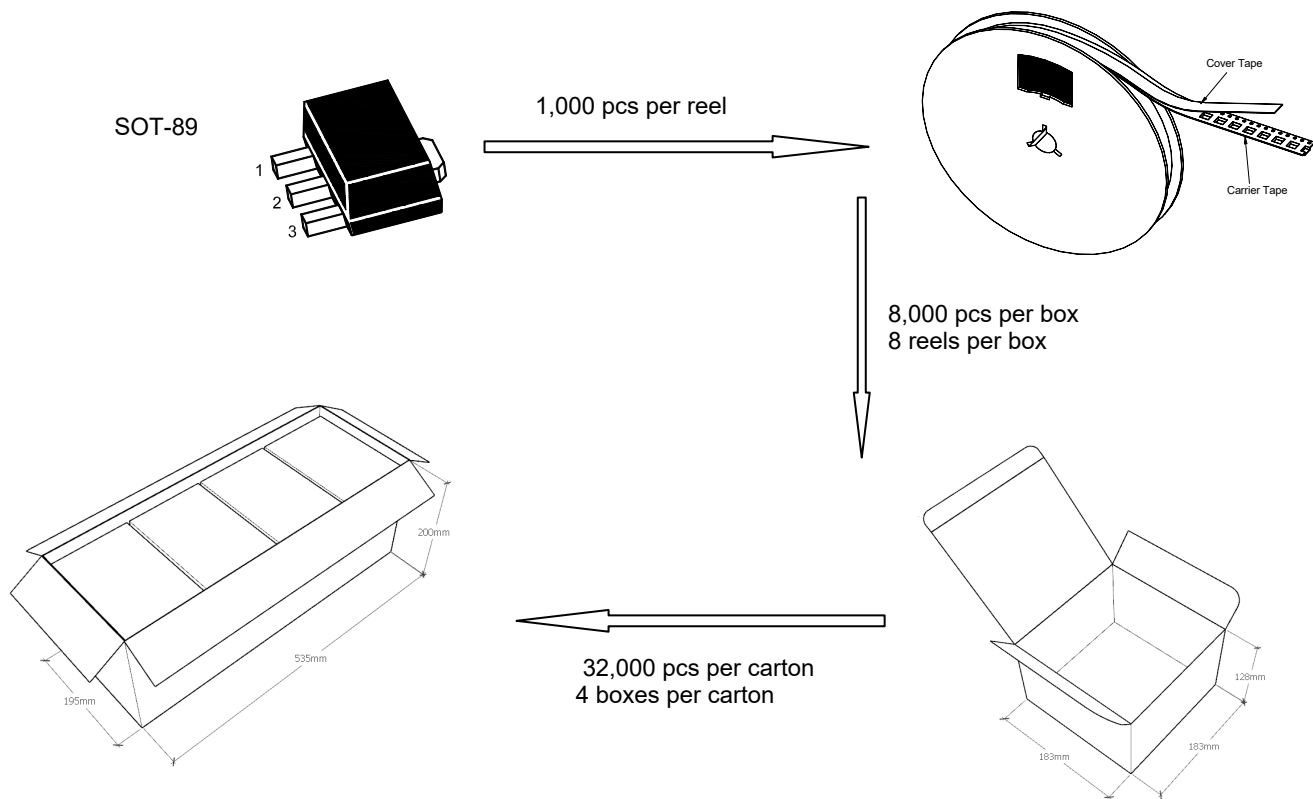


◆ Embossed tape and reel data

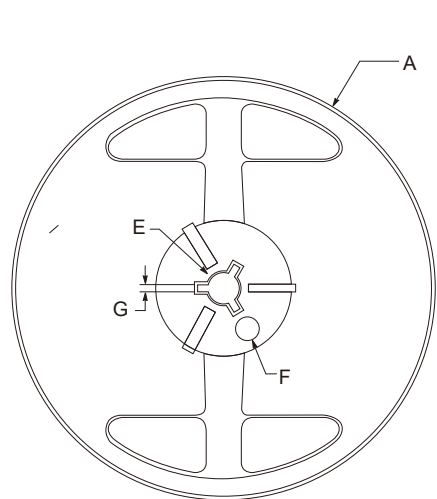

Reel (7")

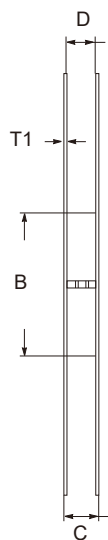


symbol	Value(unit:mm)
A	$\Phi 179 \pm 1$
B	60.5 ± 0.2
C	15.3 ± 0.3
D	12.5~13.7
E	$\Phi 13.5 \pm 0.2$
F	$\Phi 10.0 \pm 0.2$
G	2.7 ± 0.2
T1	1.0 ± 0.2

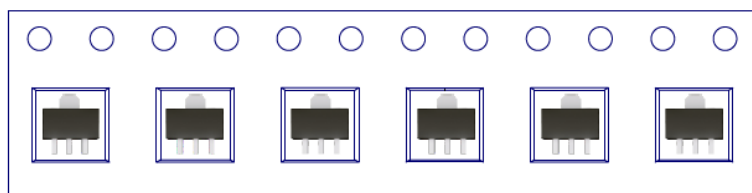

Package Specifications

- The method of packaging (3,000PCS/Reel&13inches)

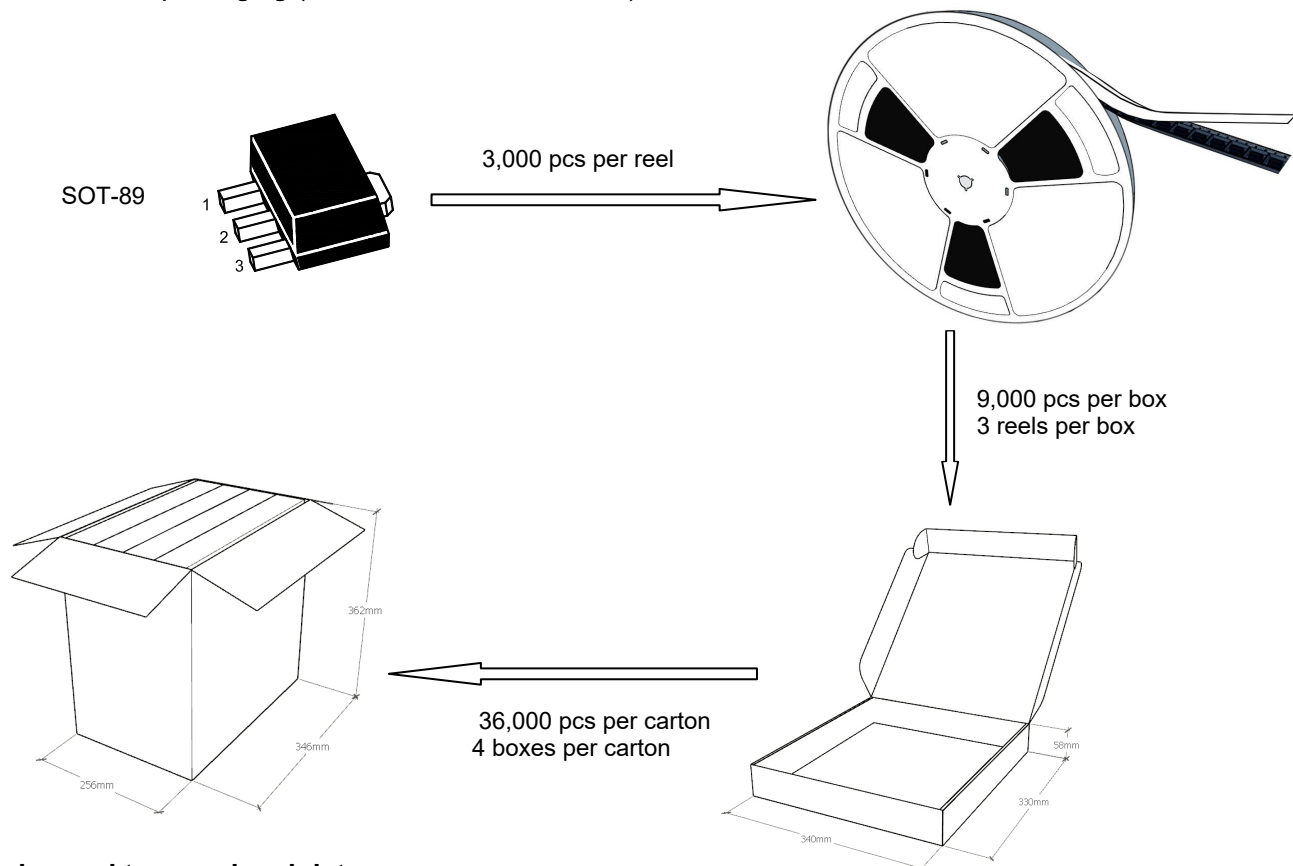

◆ Embossed tape and reel data



symbol	Value(unit:mm)
A	$\Phi 330 \pm 1$
B	12.7 ± 0.5
C	16.5 ± 0.3
D	$\Phi 99.5 \pm 0.5$
E	$\Phi 13.6 \pm 0.3$
F	2.8 ± 0.3
T1	1.9 ± 0.2

