


Features

- High Breakdown Voltage and Current
- Excellent DC Current Gain Linearity
- RoHS and Reach Compliant
- Halogen and Antimony Free
- Moisture Sensitivity Level 1


SOT-89




(Top View)

1.Base 2.Collector 3. Emitter

Equivalent Circuit



Marking Code :



X:Current Gain Group
 2SD1898SQ-P=1898P
 2SD1898SQ-Q=1898Q
 2SD1898SQ-R=1898R

Absolute Maximum Ratings

Ratings at 25°C ambient temperature unless otherwise specified.

Parameter	Symbol	Value	Unit
Collector Base Voltage	V_{CBO}	100	V
Collector Emitter Voltage	V_{CEO}	80	V
Emitter Base Voltage	V_{EBO}	5	V
Collector Current	I_C	1	A
Maximum Power Dissipation	P_D	500	mW
Junction Temperature	T_J	150	°C
Storage Temperature Range	T_{STG}	-55 to +150	°C


Thermal Characteristics

Parameter	Symbol	Value	Unit
Thermal Resistance Junction to Ambient	$R_{\theta JA}$	250	°C/W




Electrical Characteristics (T_A=25°C)

Parameter	Symbol	Min.	Typ.	Max.	Unit
DC Current Gain at V _{CE} = 3 V, I _C = 500 mA Current Gain Group	P Q R H _{FE}	82 120 180	-- -- --	180 270 390	--
Collector Base Cutoff Current at V _{CB} = 80 V	I _{CBO}	--	--	0.1	μA
Emitter Base Cutoff Current at V _{EB} = 4 V	I _{EBO}	--	--	0.1	μA
Collector Base Breakdown Voltage at I _C = 50 μA	V _{(BR)CBO}	100	--	--	V
Collector Emitter Breakdown Voltage at I _C = 1 mA	V _{(BR)CEO}	80	--	--	V
Emitter Base Breakdown Voltage at I _E = 50 μA	V _{(BR)EBO}	5	--	--	V
Collector Emitter Saturation Voltage at I _C = 500 mA, I _B = 20 mA	V _{CE(sat)}	--	--	0.4	V
Transition Frequency at V _{CE} = 10 V, I _C = 50 mA, f = 100 MHz	f _T	--	100	--	MHz
Output Capacitance at V _{CB} = 10 V, I _E = 0, f = 1 MHz	C _{ob}	--	20	--	pF




Typical Characteristic Curves

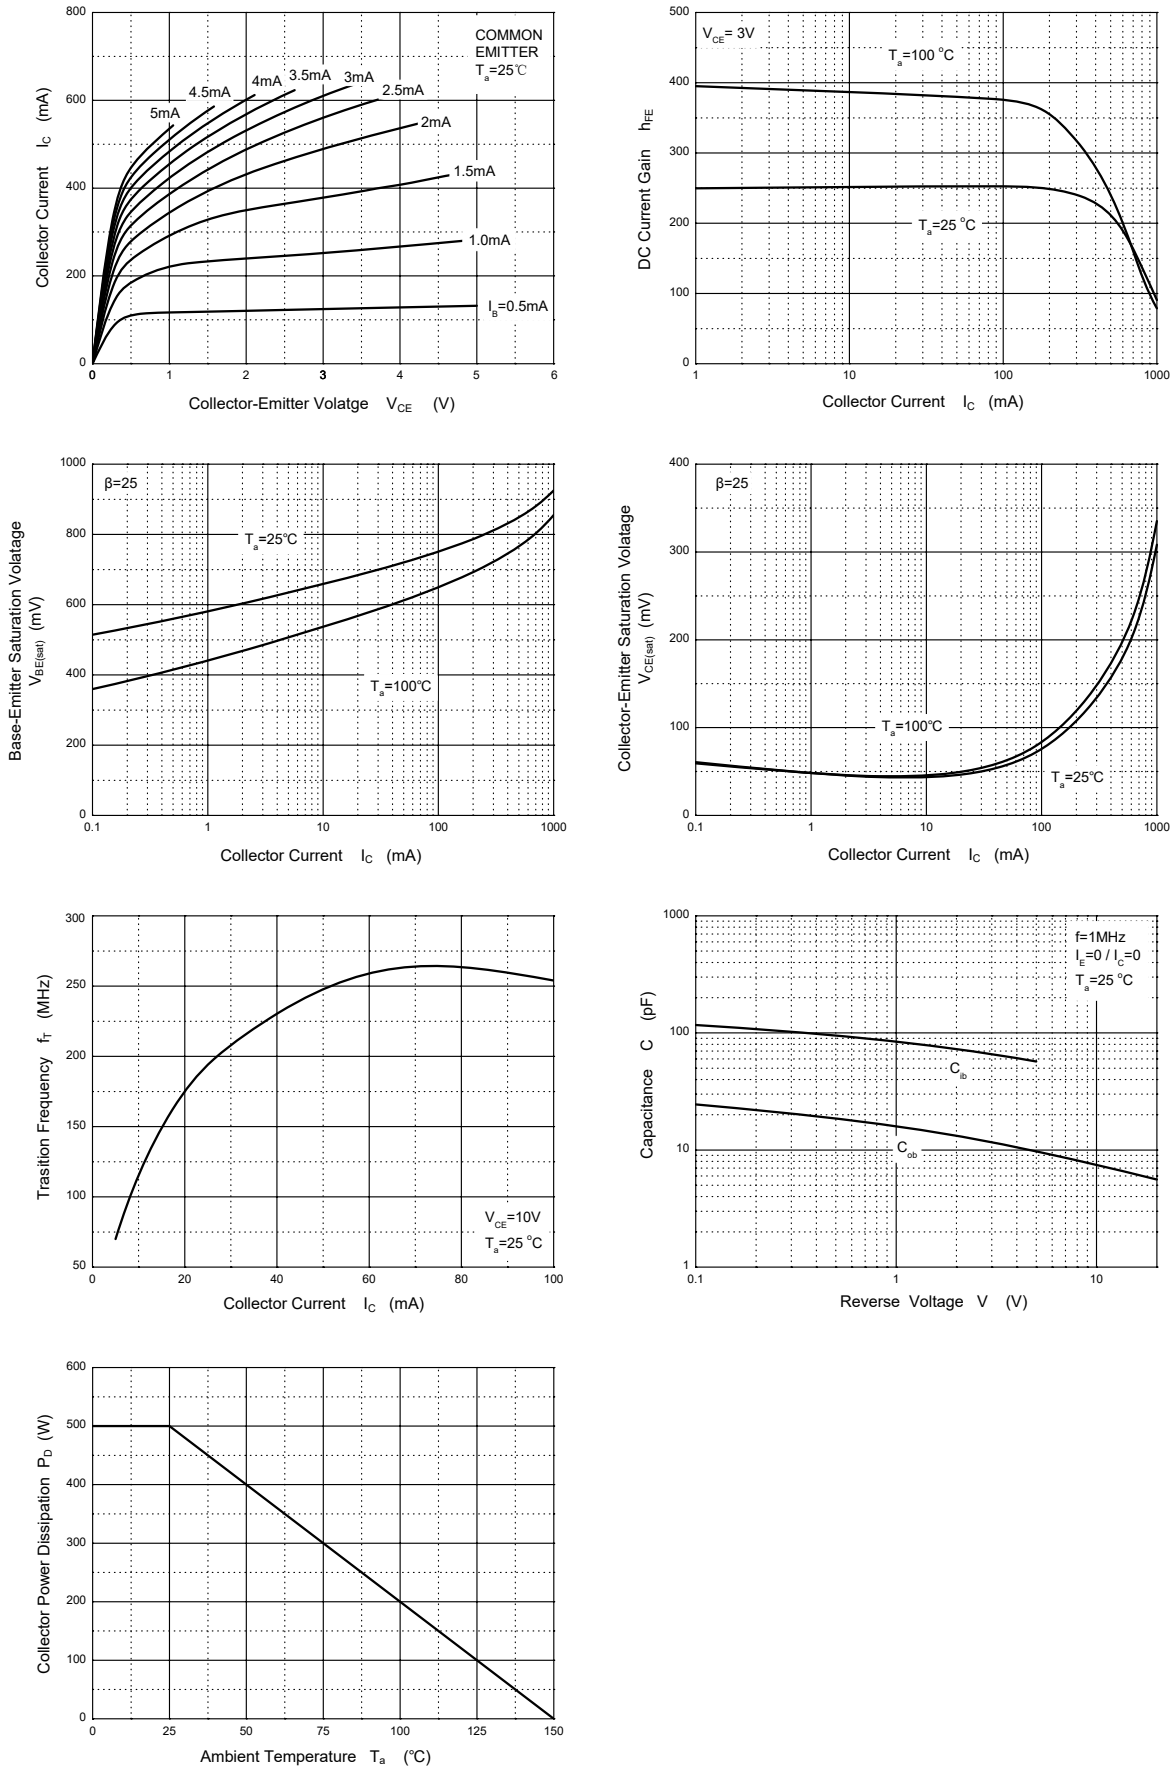

Package Outline

SOT-89

Dimensions in mm

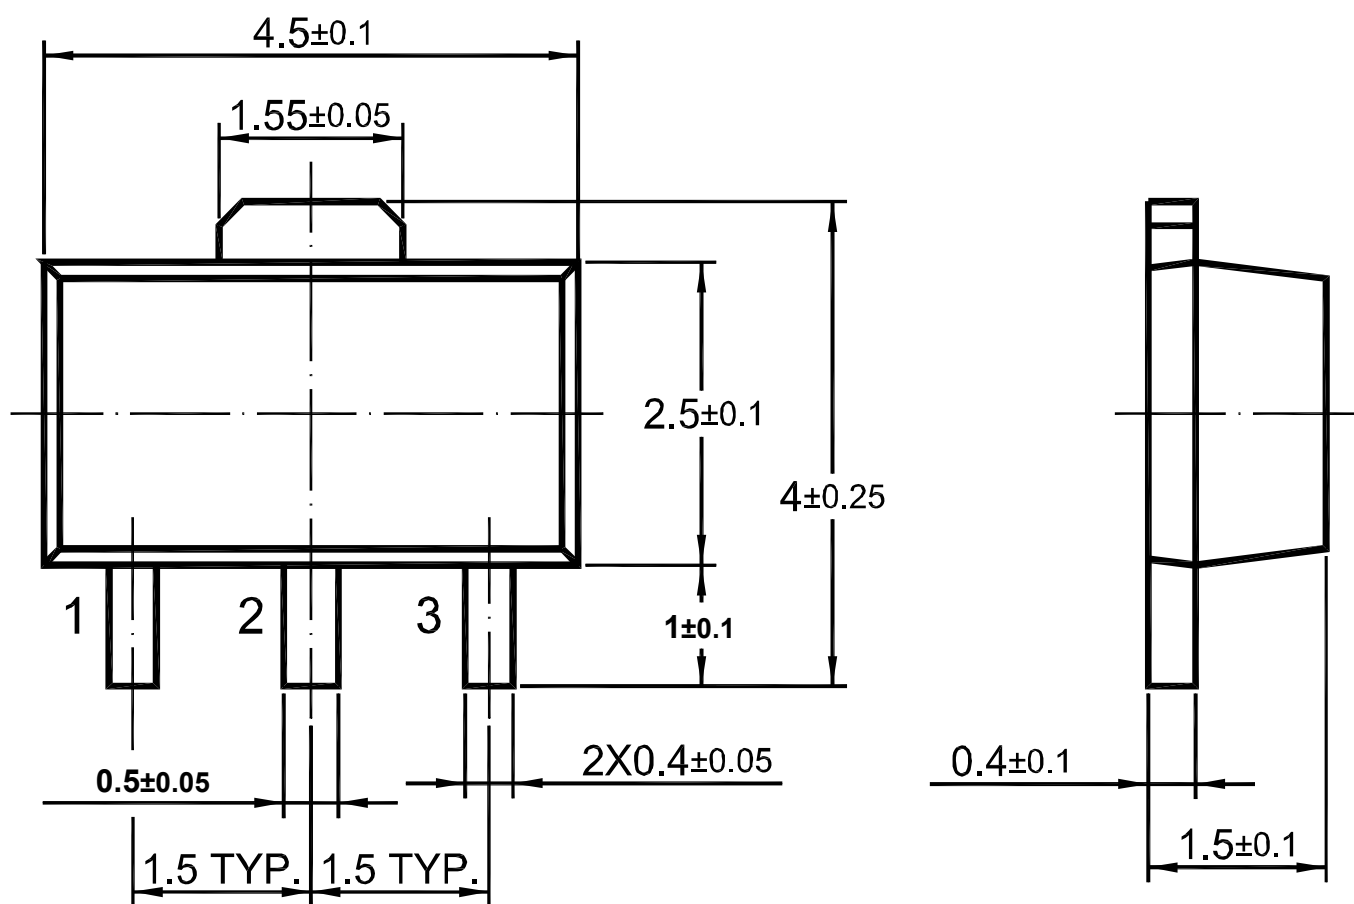


Ordering Information

Device	Package	Shipping
2SD1898SQ	SOT-89	1,000PCS/Reel&7inches
		3,000PCS/Reel&13inches

Conditions of Soldering and Storage

◆ Recommended condition of reflow soldering

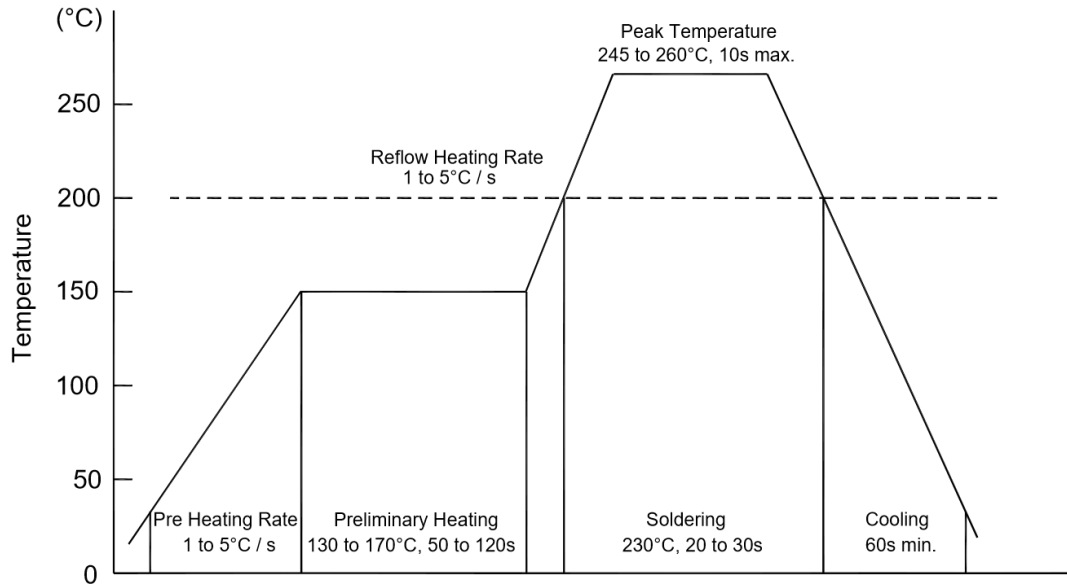

Recommended peak temperature is over 245°C. If peak temperature is below 245°C, you may adjust the following parameters:

- Time length of peak temperature (longer)
- Time length of soldering (longer)
- Thickness of solder paste (thicker)

◆ Conditions of hand soldering


- Temperature: 300°C
- Time: 3s max.
- Times: one time

◆ Storage conditions


- **Temperature**
5 to 40°C
- **Humidity**
30 to 80% RH
- **Recommended period**
One year after manufacturing

Package Specifications


- The method of packaging (1,000PCS/Reel&7inches)

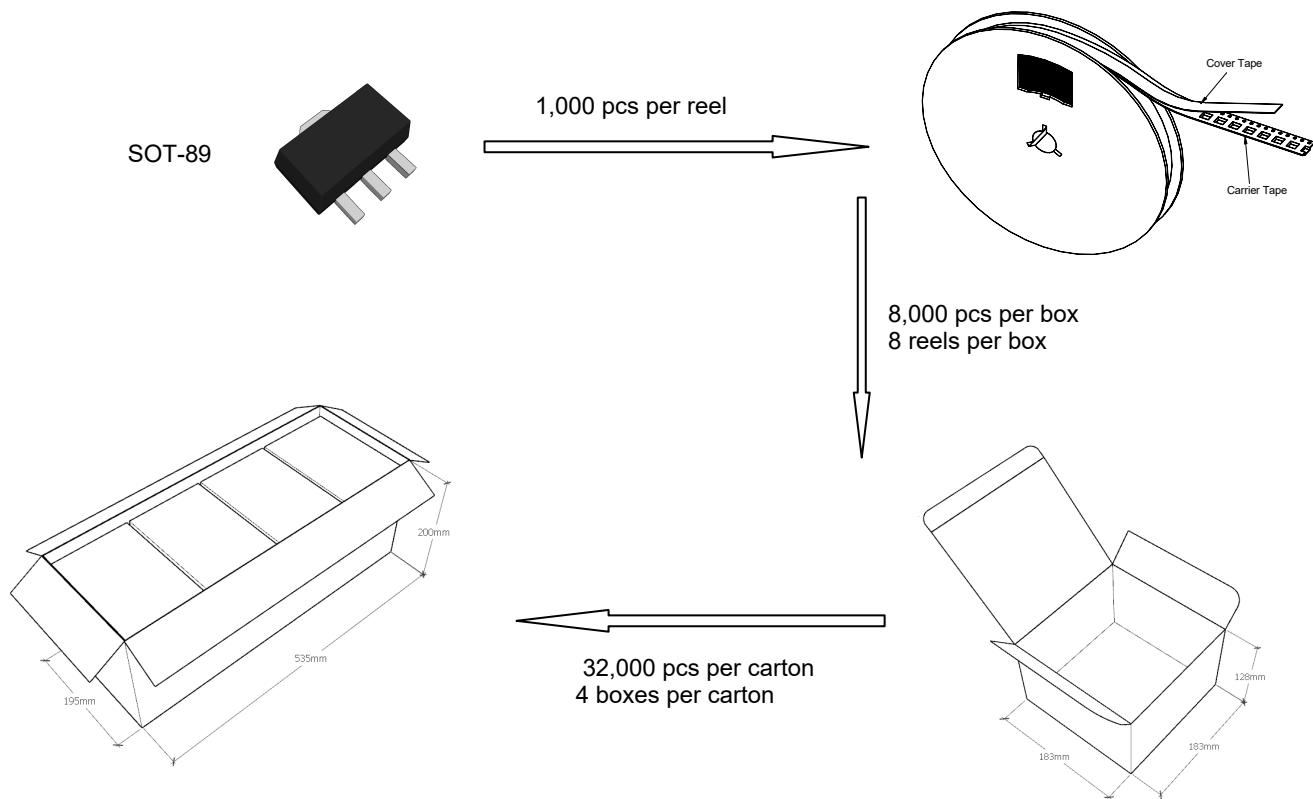


◆ Embossed tape and reel data

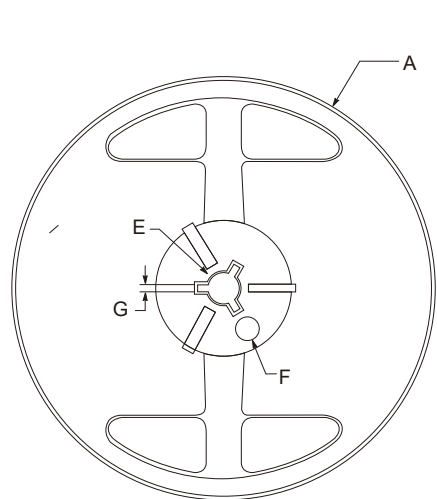

Reel (7")




symbol	Value(unit:mm)
A	$\Phi 179 \pm 1$
B	60.5 ± 0.2
C	15.3 ± 0.3
D	$12.5 \sim 13.7$
E	$\Phi 13.5 \pm 0.2$
F	$\Phi 10.0 \pm 0.2$
G	2.7 ± 0.2
T1	1.0 ± 0.2

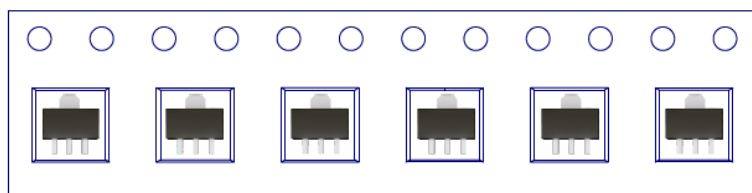


Package Specifications

- The method of packaging (3,000PCS/Reel&13inches)

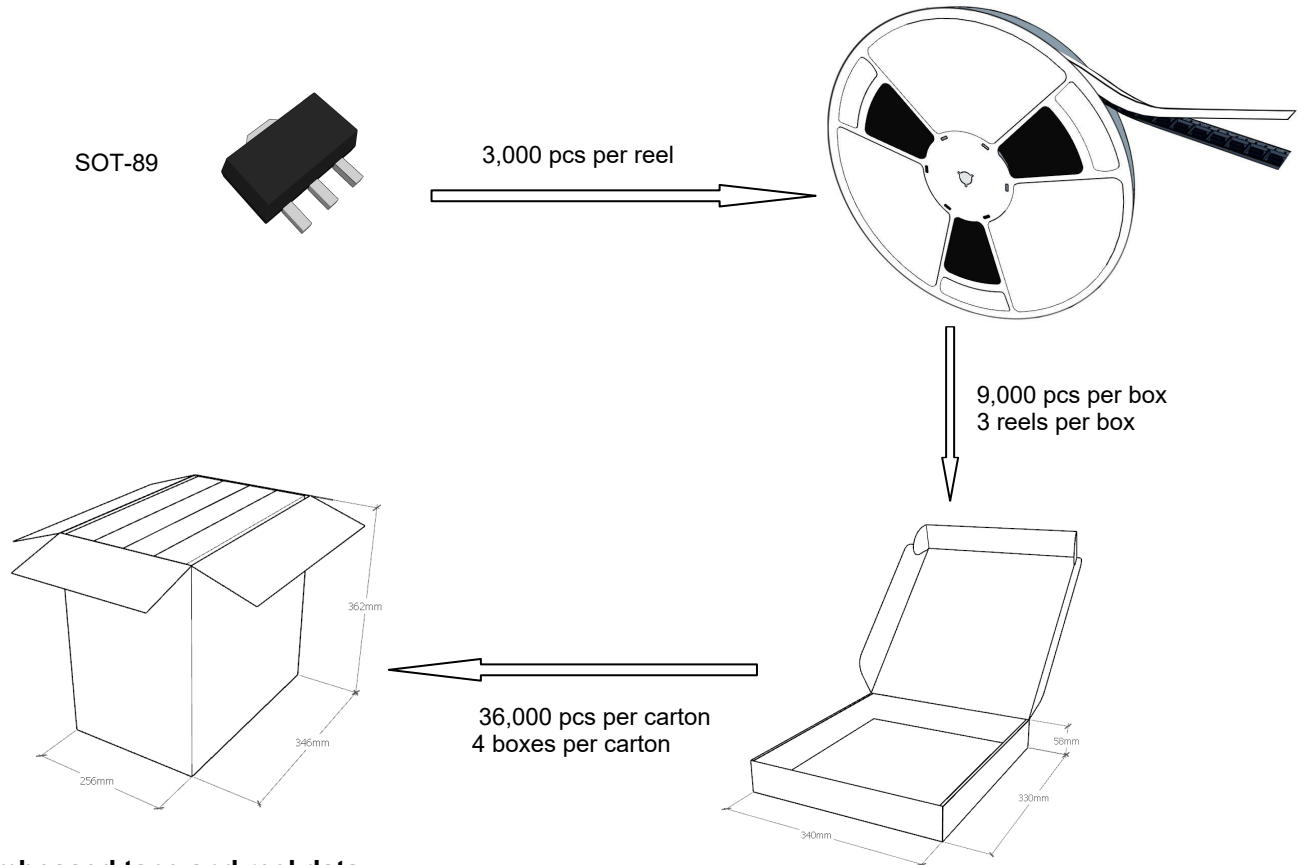

◆ Embossed tape and reel data

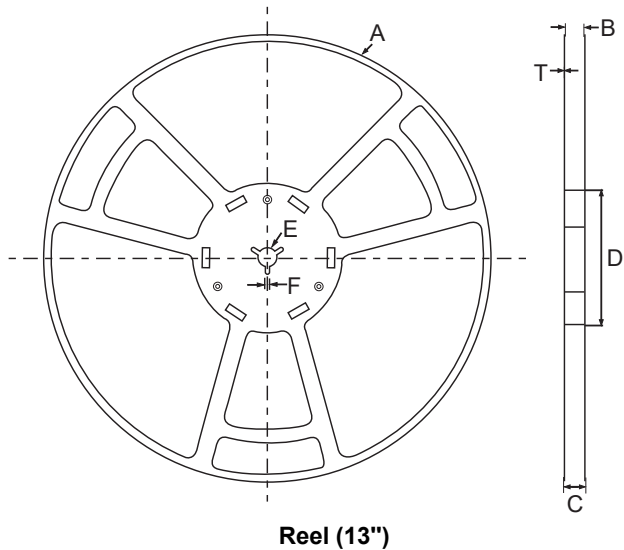

symbol	Value(unit:mm)
A	$\Phi 330 \pm 1$
B	12.7 ± 0.5
C	16.5 ± 0.3
D	$\Phi 99.5 \pm 0.5$
E	$\Phi 13.6 \pm 0.3$
F	2.8 ± 0.3
T1	1.9 ± 0.2

