



Features

- Low Saturation Voltage


Equivalent Circuit

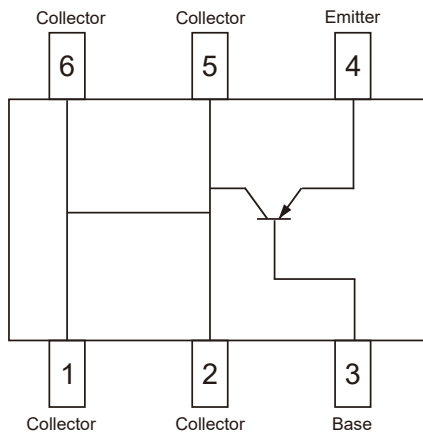

SOT-23-6



Marking Code

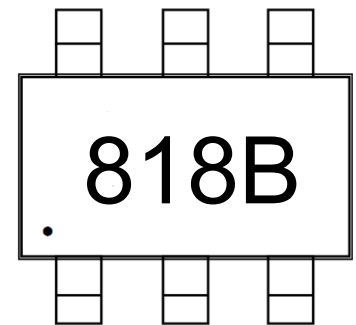

Absolute Maximum Ratings

Ratings at 25°C ambient temperature unless otherwise specified.


Parameter	Symbol	Value	Unit
Collector Base Voltage	$-V_{CBO}$	30	V
Collector Emitter Voltage	$-V_{CEO}$	30	V
Emitter Base Voltage	$-V_{EBO}$	5	V
Collector Current	$-I_C$	3	A
Maximum Power Dissipation	P_D	500	mW
Junction Temperature	T_J	150	°C
Storage Temperature Range	T_{STG}	-55 to +150	°C



Electrical Characteristics (T_A=25°C)

Parameter	Symbol	Min.	Max.	Unit
DC Current Gain at V _{CE} = -1 V, I _C = -500 mA at V _{CE} = -3 V, I _C = -2.5 A	H _{FE}	100 100	-- --	--
Collector Base Cutoff Current at V _{CB} = -30 V	-I _{CBO}	--	100	nA
Collector Base Cutoff Current at V _{EB} = -5 V	-I _{EBO}	--	100	nA
Collector Base Breakdown Voltage at I _C = -100 μA	-V _{(BR)CBO}	30	--	V
Collector Emitter Breakdown Voltage at I _C = -10 mA	-V _{(BR)CEO}	30	--	V
Emitter Base Breakdown Voltage at I _E = -100 μA	-V _{(BR)EBO}	5	--	V
Collector Emitter Saturation Voltage at I _C = -500 mA, I _B = -5 mA at I _C = -1.2 A, I _B = -12 mA at I _C = -2 A, I _B = -20 mA	-V _{CE(sat)}	-- -- --	0.15 0.45 0.8	V
Base Emitter Saturation Voltage at I _C = -500 mA, I _B = -5 mA at I _C = -1.2 A, I _B = -12 mA at I _C = -2 A, I _B = -20 mA	-V _{BE(sat)}	-- -- --	1.1 1.1 1.2	V
Base Emitter On Voltage at V _{CE} = -2 V, I _C = -500 mA	-V _{BE(on)}	--	1.1	V


Typical Characteristic Curves

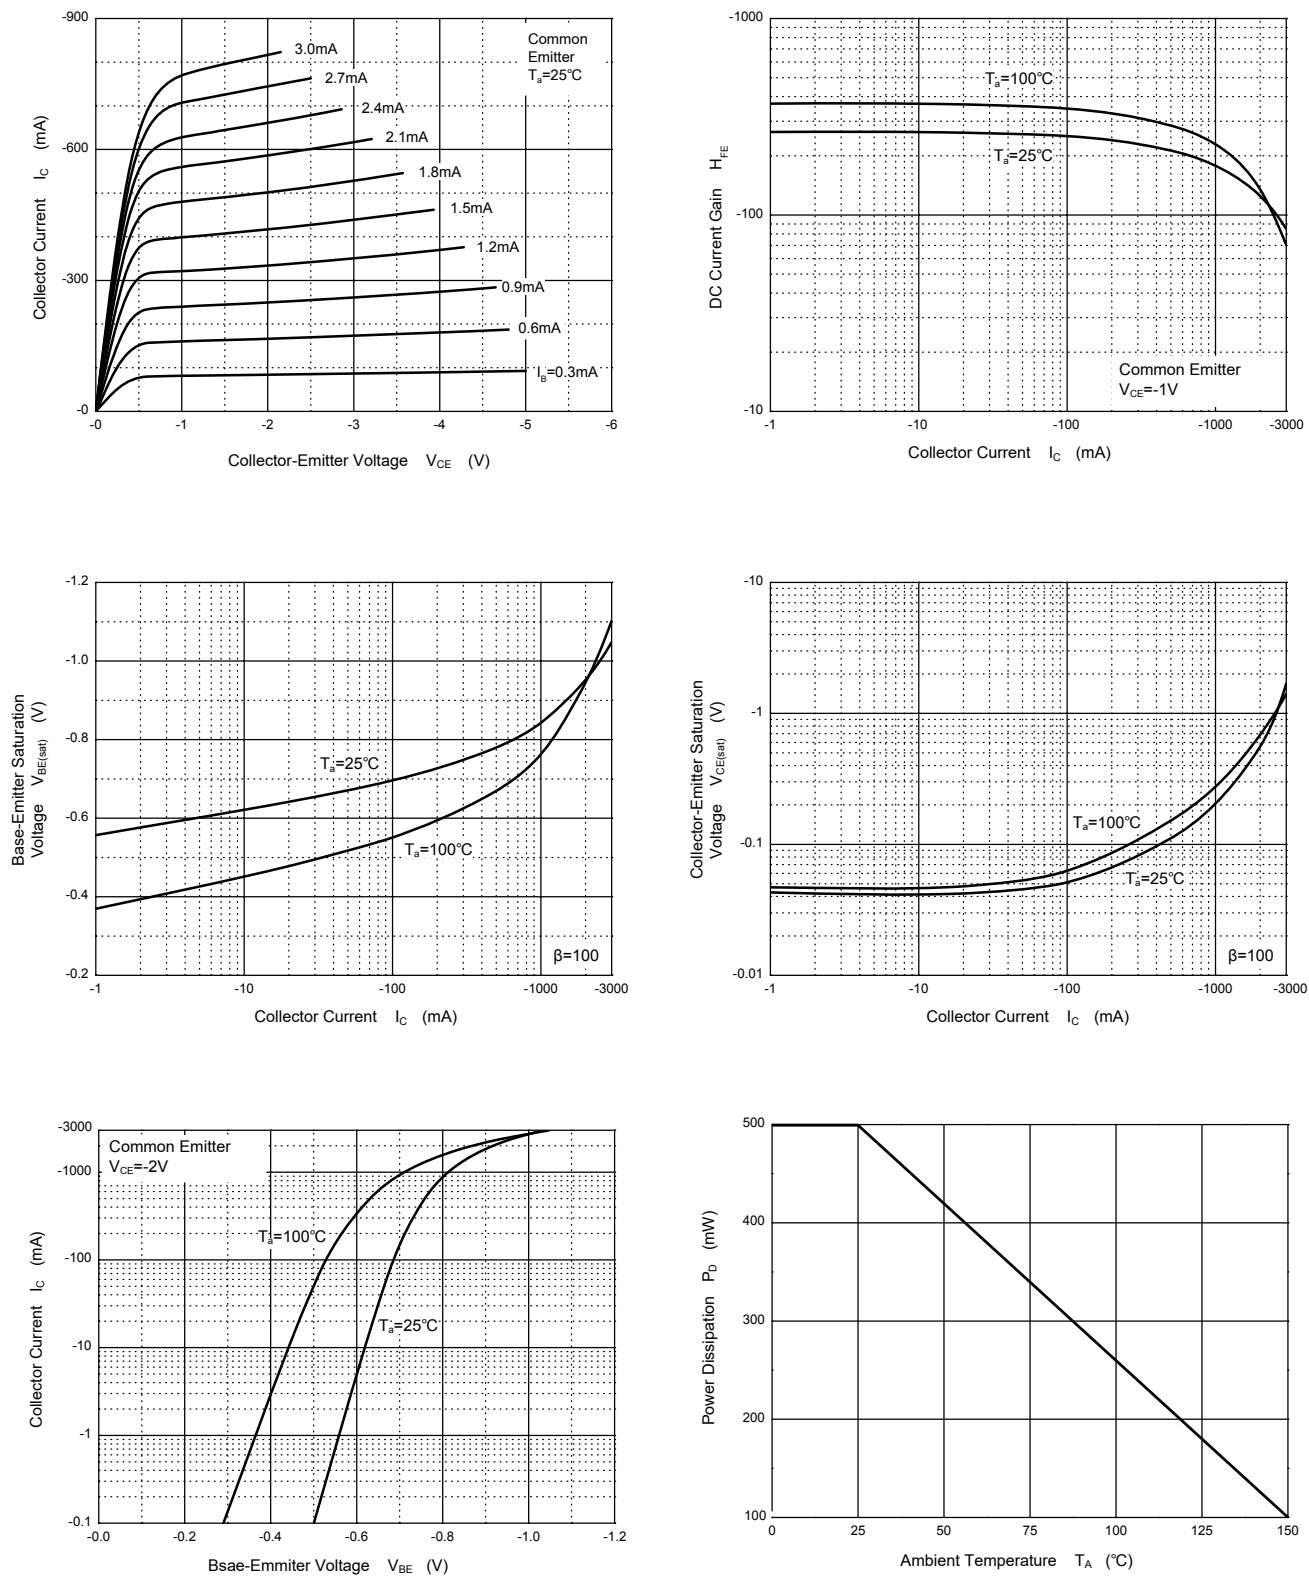

Package Outline

SOT-23-6

Dimensions in mm

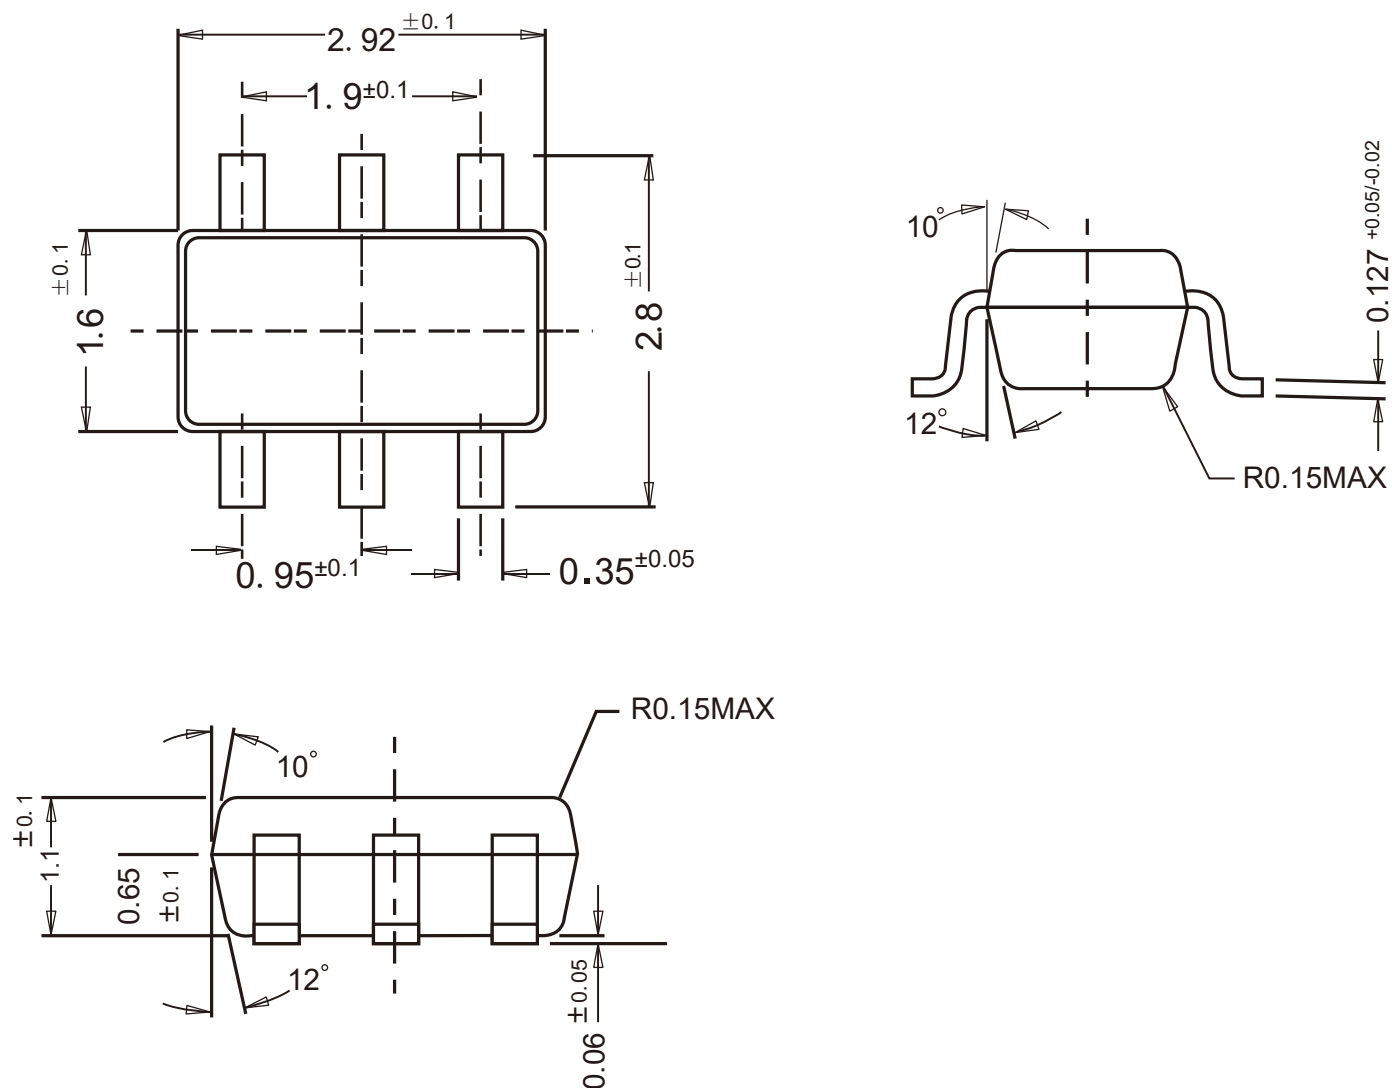


Ordering Information

Device	Package	Shipping
PJ818B	SOT-23-6	3,000PCS/Reel&7inches

Conditions of Soldering and Storage

◆ Recommended condition of reflow soldering

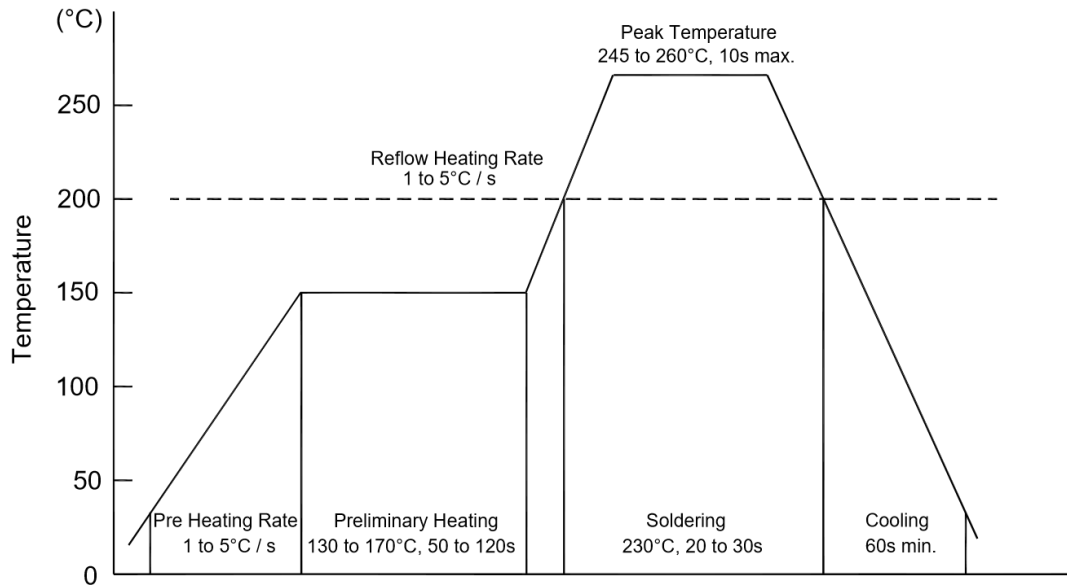

Recommended peak temperature is over 245 °C. If peak temperature is below 245 °C, you may adjust the following parameters:

- Time length of peak temperature (longer)
- Time length of soldering (longer)
- Thickness of solder paste (thicker)

◆ Conditions of hand soldering


- Temperature: 370 °C
- Time: 3s max.
- Times: one time

◆ Storage conditions


- **Temperature**
5 to 40 °C
- **Humidity**
30 to 80% RH
- **Recommended period**
One year after manufacturing

Package Specifications

- The method of packaging

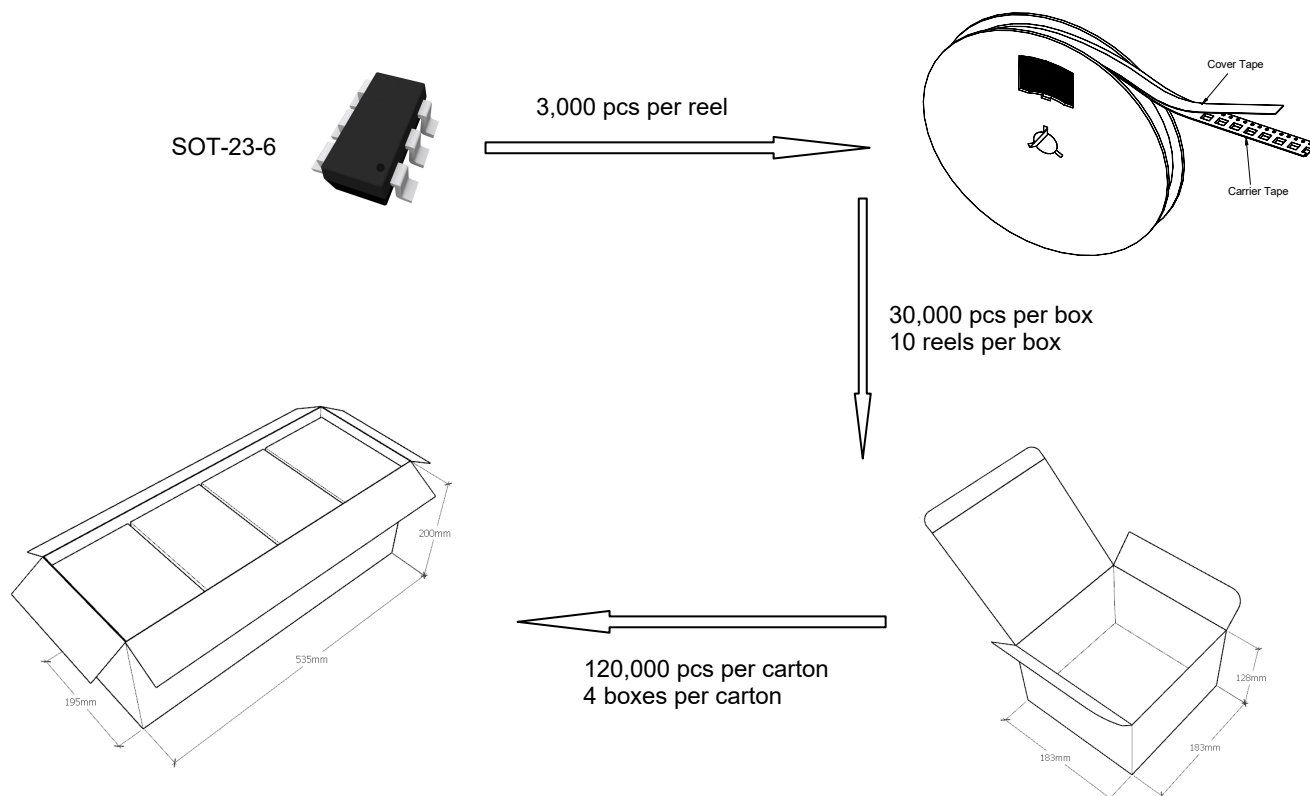


◆ Embossed tape and reel data

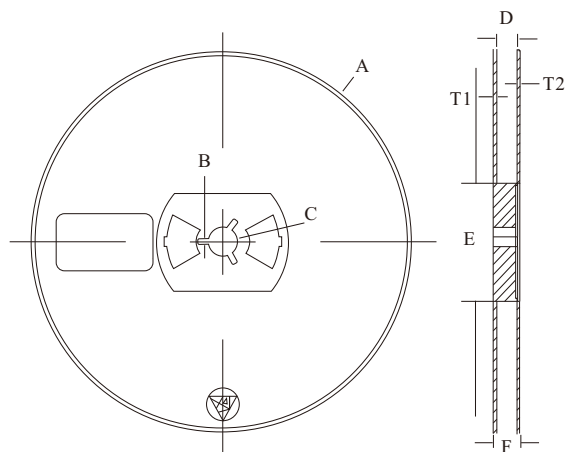

Symbol	Value (unit: mm)
A	Ø 177.8±1
B	2.7±0.2
C	Ø 13.5±0.2
E	Ø 54.5±0.2
F	12.3±0.3
D	9.6+2/-0.3
T1	1.0±0.2
T2	1.2±0.2

Reel (7")

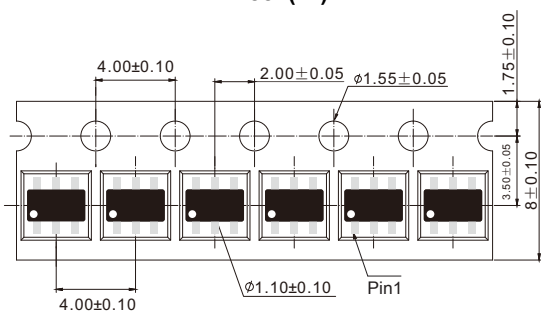

Tape (8mm)