



PJM04P20SG

P-Channel Enhancement Mode Power MOSFET

Product Summary

- $V_{DS} = -20V, I_D = -4.1A$
- $R_{DS(on)} < 39m\Omega @ V_{GS} = -4.5V$
- $R_{DS(on)} < 50m\Omega @ V_{GS} = -2.5V$


Features

- Advanced Trench Technology
- RoHS and Reach Compliant
- Halogen and Antimony Free
- Moisture Sensitivity Level 3


Application

- Load Switch
- PWM Applications
- Power Management

Marking Code




SOT-23-6



(Top View)

Pin	Description
1,2,5,6	Drain
3	Gate
4	Source

Schematic Diagram



Absolute Maximum Ratings

(Ta=25°C unless otherwise specified)

Parameter	Symbol	Value	Unit
Drain-Source Voltage	-V _{DS}	20	V
Gate-Source Voltage	V _{GS}	±12	V
Drain Current-Continuous	-I _D	4.1	A
Drain Current-Pulsed ^{Note1}	-I _{DM}	16	A
Maximum Power Dissipation	P _D	1.2	W
Junction Temperature	T _J	150	°C
Storage Temperature Range	T _{STG}	-55 to +150	°C

Thermal Characteristics

Thermal Resistance,Junction-to-Ambient ^{Note2}	R _{θJA}	104	°C/W
---	------------------	-----	------



PJM04P20SG

P-Channel Enhancement Mode Power MOSFET

Electrical Characteristics

(Ta=25°C unless otherwise specified)

Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Static Characteristics						
Drain-Source Breakdown Voltage	-V _{(BR)DSS}	V _{GS} =0V, I _D =-250μA	20	--	--	V
Zero Gate Voltage Drain Current	-I _{DSS}	V _{DS} =-20V, V _{GS} =0V	--	--	1	μA
Gate-Body Leakage Current	I _{GSS}	V _{GS} =±12V, V _{DS} =0V	--	--	±100	nA
Gate Threshold Voltage ^{Note3}	-V _{GS(th)}	V _{DS} =V _{GS} , I _D =-250μA	0.4	0.65	1	V
Drain-Source On-Resistance ^{Note3}	R _{DS(on)}	V _{GS} =-4.5V, I _D =-4.1A	--	28	39	mΩ
		V _{GS} =-2.5V, I _D =-3A	--	35	50	mΩ
Forward Transconductance ^{Note3}	g _{FS}	V _{DS} =-5V, I _D =-2A	--	10.5	--	S
Dynamic Characteristics						
Input Capacitance	C _{iss}	V _{DS} =-10V, V _{GS} =0V, f=1MHz	--	762	--	pF
Output Capacitance	C _{oss}		--	108	--	pF
Reverse Transfer Capacitance	C _{rss}		--	94	--	pF
Gate Resistance	R _G	V _{DS} =0V, V _{GS} =0V, f=1MHz	--	12	--	Ω
Total Gate Charge	Q _g	V _{DS} =-10V, I _D =-4.1A, V _{GS} =4.5V	--	13.1	--	nC
Gate-Source Charge	Q _{gs}		--	2	--	nC
Gate-Drain Charge	Q _{gd}		--	2.7	--	nC
Switching Characteristics						
Turn-on Delay Time	t _{d(on)}	V _{DD} =-10V, R _L =1.2Ω, V _{GS} =-4.5V, R _{GEN} =1Ω	--	12	--	nS
Turn-on Rise Time	t _r		--	35	--	nS
Turn-off Delay Time	t _{d(off)}		--	30	--	nS
Turn-off Fall Time	t _f		--	10	--	nS
Source-Drain Diode Characteristics						
Diode Forward Voltage	-V _{SD}	V _{GS} =0V, I _S =-4.1A	--	--	1.2	V
Diode Forward Current	-I _S		--	--	4.1	A

Note: 1. Repetitive Rating: Pulse width limited by maximum junction temperature.

2. Surface Mounted on FR4 Board, t ≤ 10 sec.







3. Pulse Test: Pulse width≤300μs, duty cycle≤2%.




PJM04P20SG

P-Channel Enhancement Mode Power MOSFET



Typical Characteristic Curves

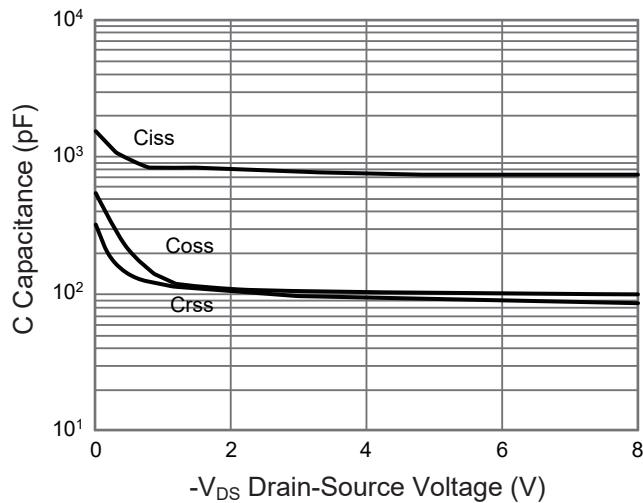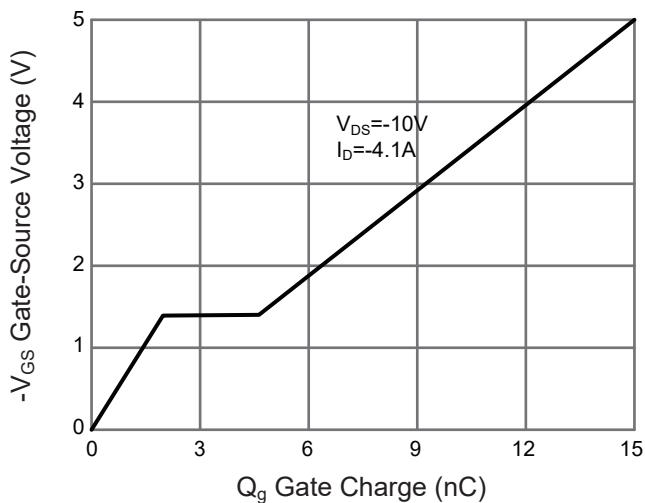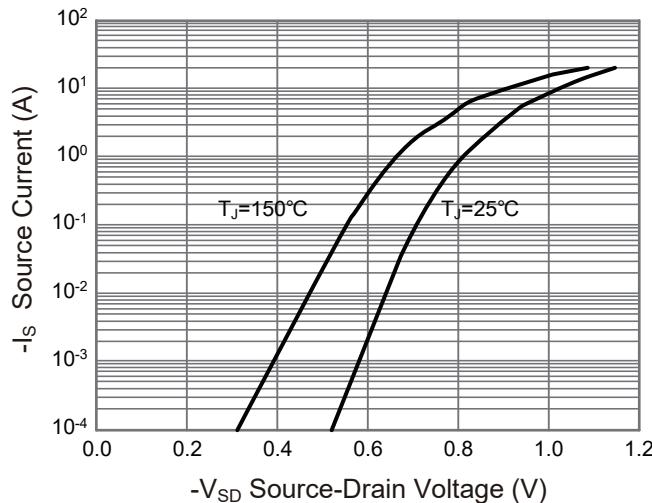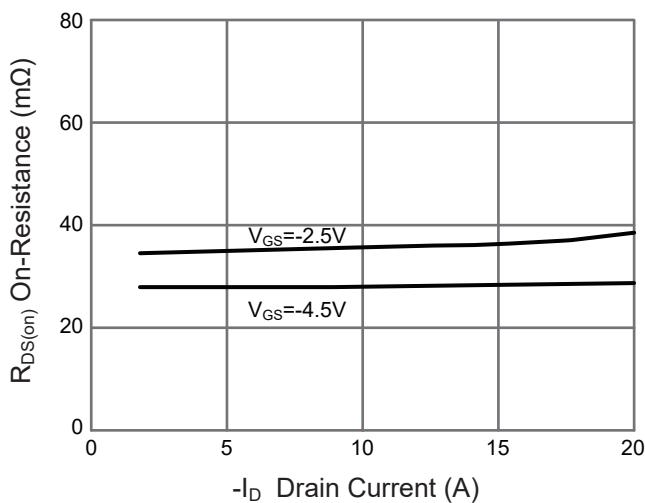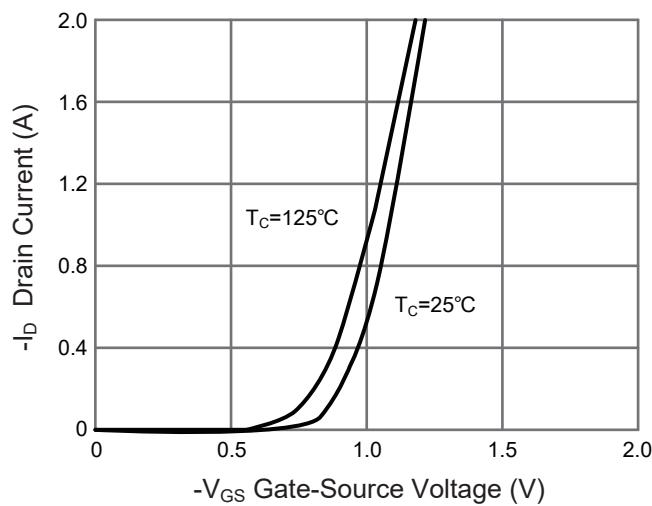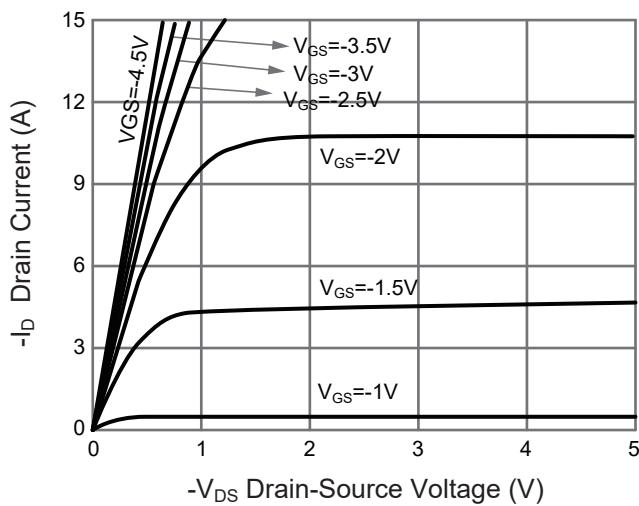



PJM04P20SG

P-Channel Enhancement Mode Power MOSFET

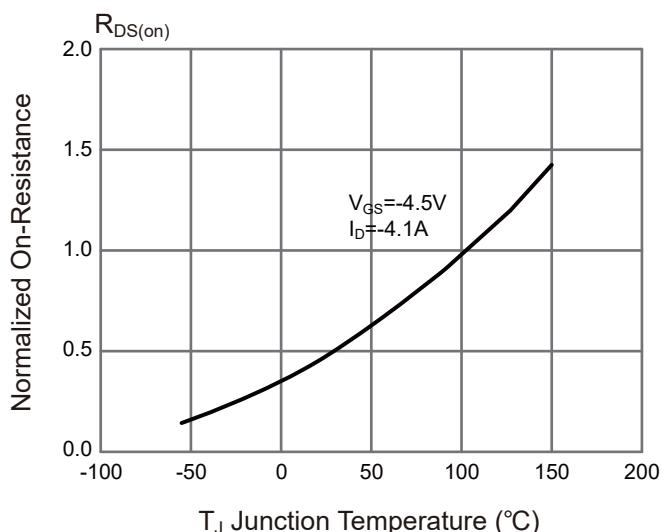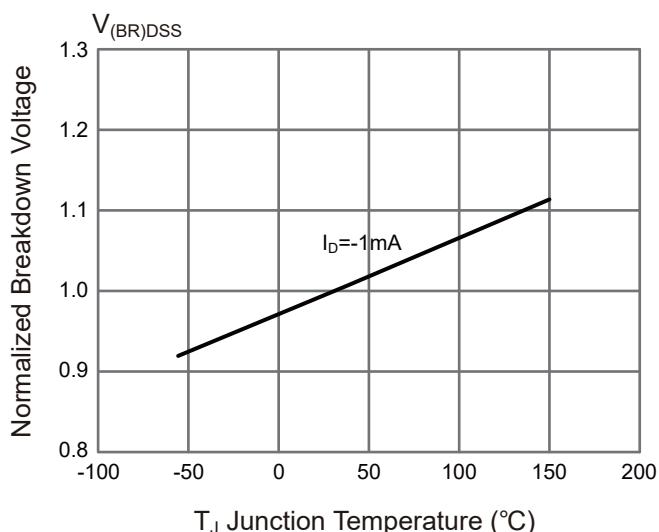






PJM04P20SG

P-Channel Enhancement Mode Power MOSFET

Package Outline


SOT-23-6

Dimensions in mm

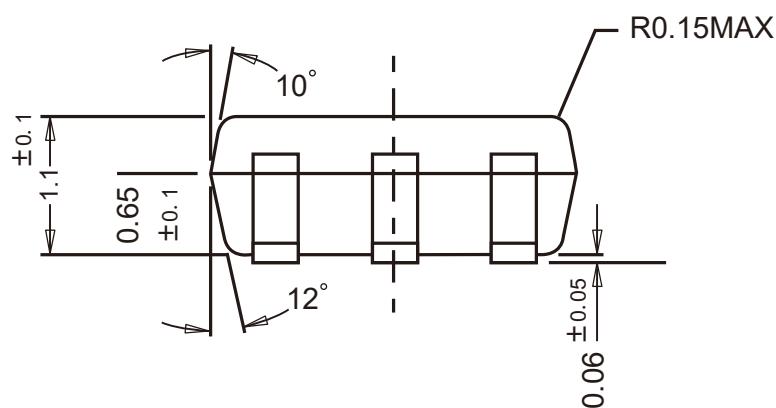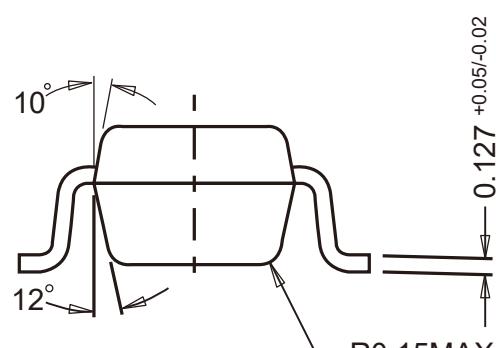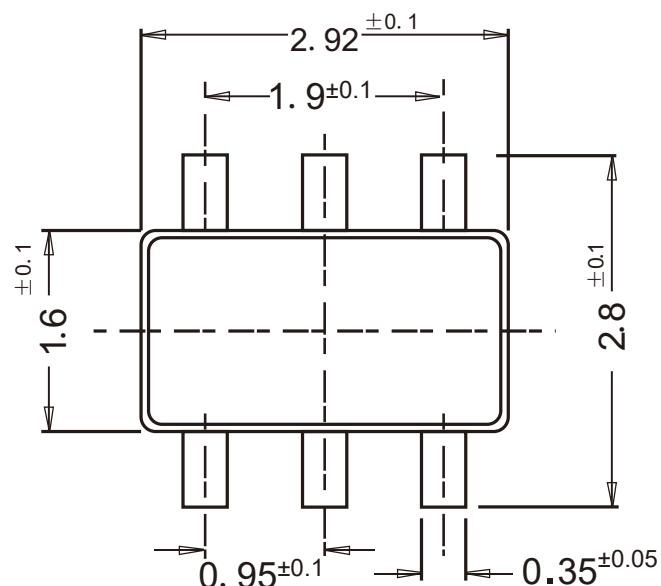


Ordering Information

Device	Package	Shipping
PJM04P20SG	SOT-23-6	3,000PCS/Reel&7inches



Conditions of Soldering and Storage

◆ Recommended condition of reflow soldering

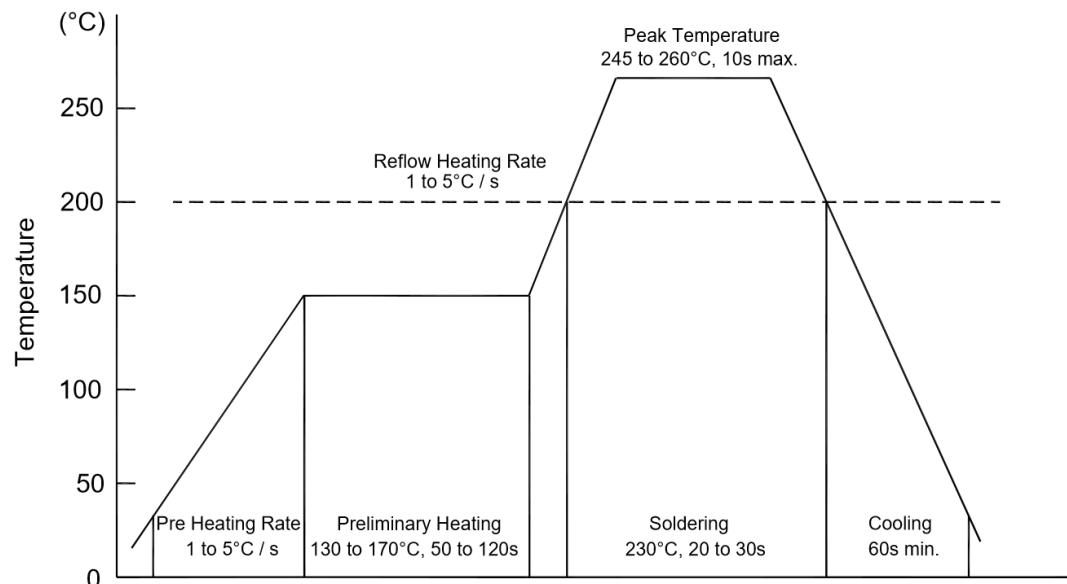

Recommended peak temperature is over 245 °C. If peak temperature is below 245 °C, you may adjust the following parameters:

- Time length of peak temperature (longer)
- Time length of soldering (longer)
- Thickness of solder paste (thicker)

◆ Conditions of hand soldering

- Temperature: 370 °C
- Time: 3s max.
- Times: one time

◆ Storage conditions

- **Temperature**
5 to 40 °C
- **Humidity**
30 to 80% RH
- **Recommended period**
One year after manufacturing




PJM04P20SG


P-Channel Enhancement Mode Power MOSFET

Package Specifications

- The method of packaging

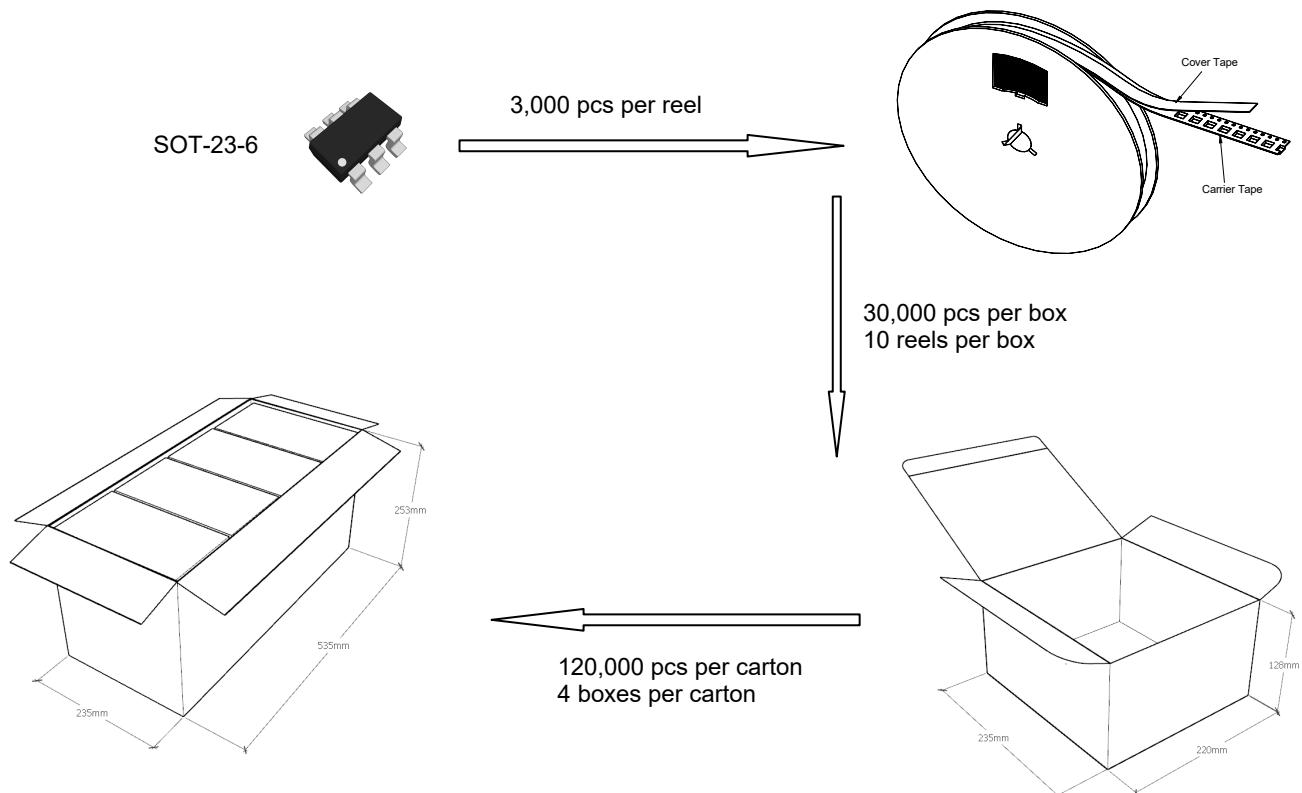


◆ Embossed tape and reel data

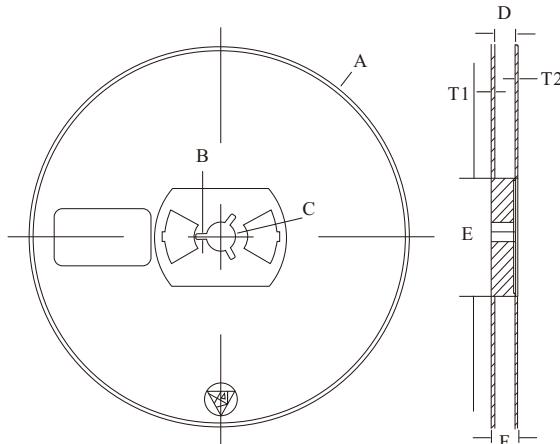

Symbol	Value (unit: mm)
A	$\varnothing 177.8 \pm 1$
B	2.7 ± 0.2
C	$\varnothing 13.5 \pm 0.2$
E	$\varnothing 54.5 \pm 0.2$
F	12.3 ± 0.3
D	$9.6 +2/-0.3$
T1	1.0 ± 0.2
T2	1.2 ± 0.2

Reel (7")

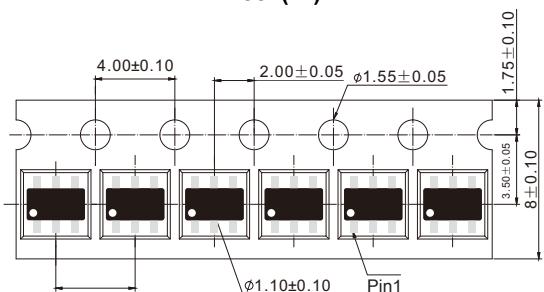

Tape (8mm)