




PJM04P30SG

P-Channel Enhancement Mode Power MOSFET

Features

- High power and current handing capability
- $V_{DS} = -30V, I_D = -4.1A$
- $R_{DS(on)} < 60m\Omega @ V_{GS} = -10V$

SOT-23-6




Marking Code:3407

Applications


- PWM applications
- Load switch
- Power management

Pin Assignment



Top View

Schematic Diagram



Absolute Maximum Ratings

Ratings at 25°C ambient temperature unless otherwise specified.

Parameter	Symbol	Value	Unit
Drain-Source Voltage	$-V_{DS}$	30	V
Gate-Source Voltage	V_{GS}	± 20	V
Drain Current-Continuous	$-I_D$	4.1	A
Drain Current-Pulsed ^{Note1}	$-I_{DM}$	20	A
Maximum Power Dissipation	P_D	1.2	W
Junction Temperature	T_J	150	°C
Storage Temperature Range	T_{STG}	-55 to +150	°C

Thermal Characteristics

Thermal Resistance, Junction-to-Ambient ^{Note2}	$R_{\theta JA}$	104	°C/W
--	-----------------	-----	------



PJM04P30SG

P-Channel Enhancement Mode Power MOSFET

Electrical Characteristics

(Ta=25°C unless otherwise specified)

Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Static Characteristics						
Drain-Source Breakdown Voltage	-V _{(BR)DSS}	V _{GS} =0V, I _D =-250μA	30	--	--	V
Zero Gate Voltage Drain Current	-I _{DSS}	V _{DS} =-24V, V _{GS} =0V	--	--	1	μA
Gate-Body Leakage Current	I _{GSS}	V _{GS} =±20V, V _{DS} =0V	--	--	±100	nA
Gate Threshold Voltage ^{Note3}	-V _{GS(th)}	V _{DS} =V _{GS} , I _D =-250μA	1	1.4	3	V
Drain-source on-resistance ^{Note2}	R _{DS(on)}	V _{GS} =-10V, I _D =-4.1A	--	50	60	mΩ
		V _{GS} =-4.5V, I _D =-3A	--	68	87	mΩ
Forward Transconductance ^{Note3}	g _{FS}	V _{DS} =-5V, I _D =-4A	5.5	--	--	S
Dynamic Characteristics						
Input Capacitance	C _{iss}	V _{DS} =-15V, V _{GS} =0V, f=1MHz	--	650	--	pF
Output Capacitance	C _{oss}		--	105	--	pF
Reverse Transfer Capacitance	C _{rss}		--	65	--	pF
Switching Characteristics						
Turn-on Delay Time	t _{d(on)}	V _{DD} =-15V, R _L =3.6Ω V _{GS} =-10V, R _{CEN} =3Ω	--	8.5	--	nS
Turn-on Rise Time	t _r		--	4.5	--	nS
Turn-off Delay Time	t _{d(off)}		--	26	--	nS
Turn-off Fall Time	t _f		--	12.5	--	nS
Total Gate Charge	Q _g	V _{DS} =-15V I _D = -4.1A, V _{GS} =-10V	--	12.5	--	nC
Gate-Source Charge	Q _{gs}		--	2.8	--	nC
Gate-Drain Charge	Q _{gd}		--	2.7	--	nC
Source-Drain Diode Characteristics						
Diode Forward Voltage ^{Note3}	-V _{SD}	V _{GS} =0V, I _S =-4.1A	--	--	1.2	V
Diode Forward Current ^{Note2}	-I _S		--	--	4.1	A

Note: 1. Repetitive Rating: Pulse width limited by maximum junction temperature.

2. Surface Mounted on FR4 Board, t ≤ 10 sec.







3. Pulse Test: Pulse width≤300μs, duty cycle≤2%.



PJM04P30SG

P-Channel Enhancement Mode Power MOSFET





Typical Characteristic Curves

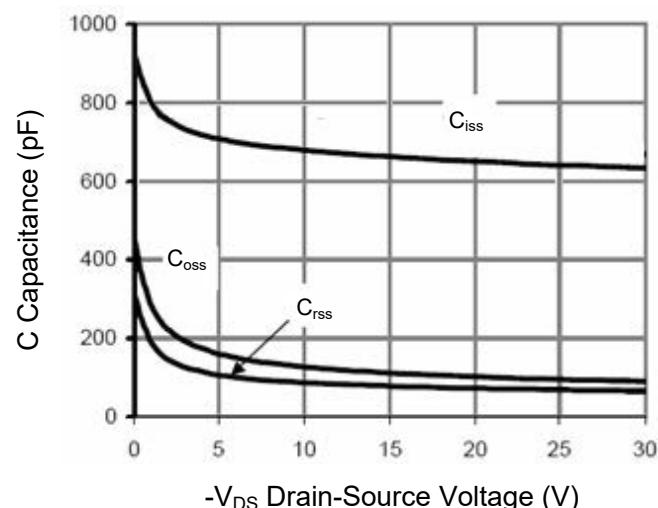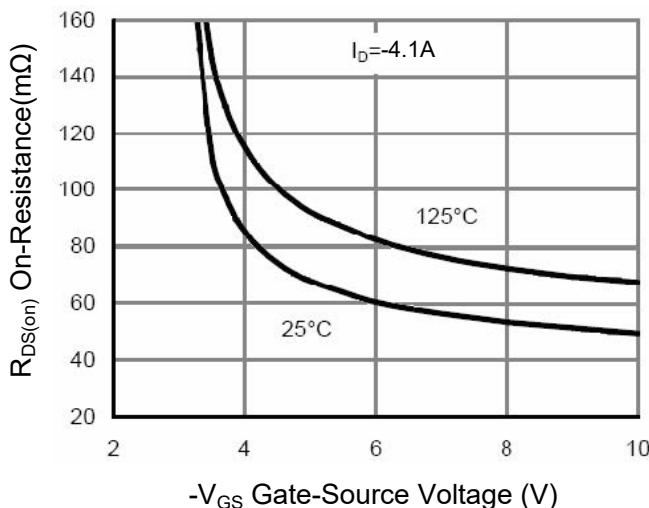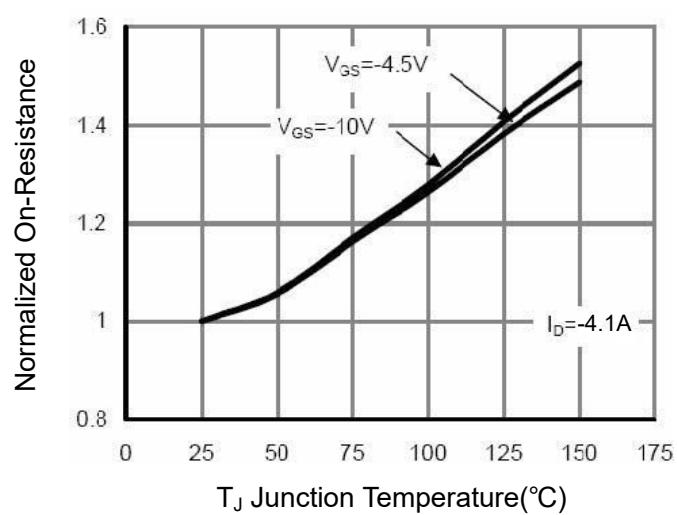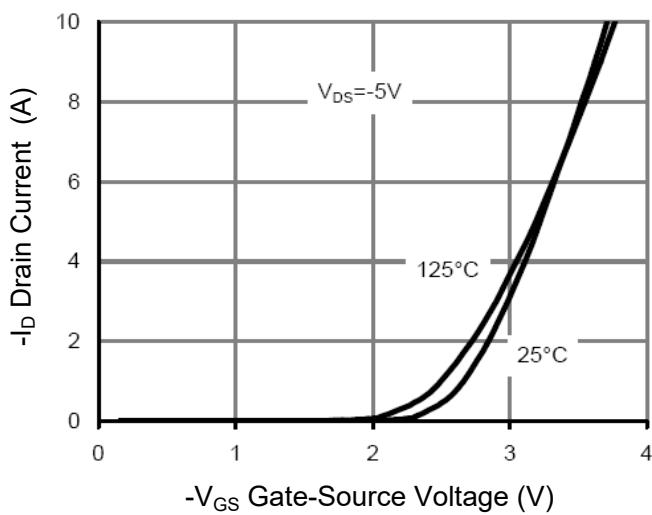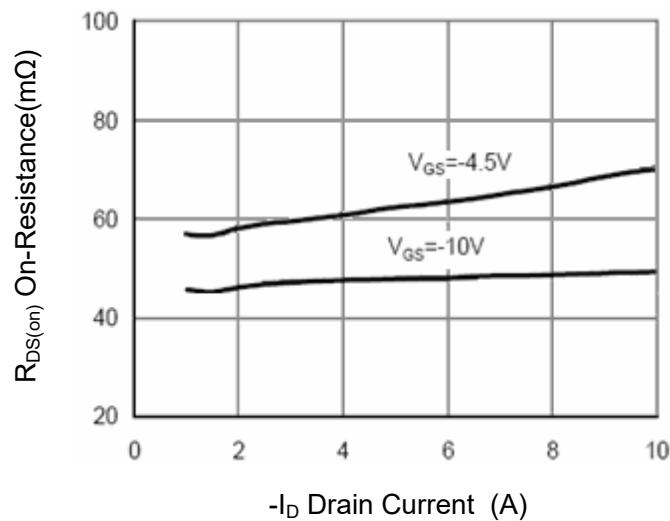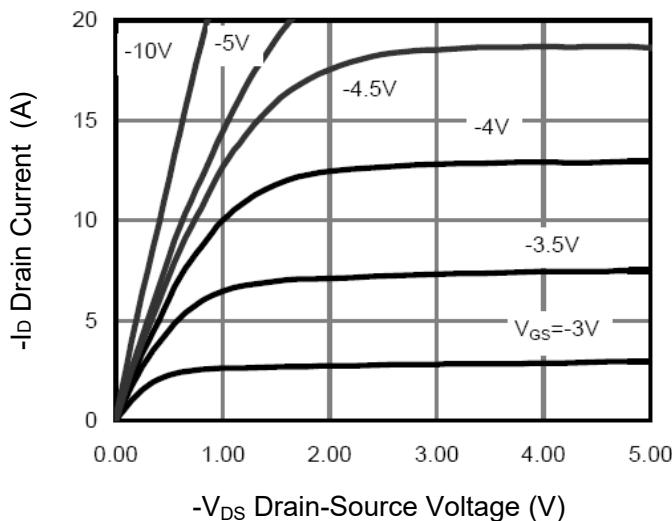



PJM04P30SG

P-Channel Enhancement Mode Power MOSFET

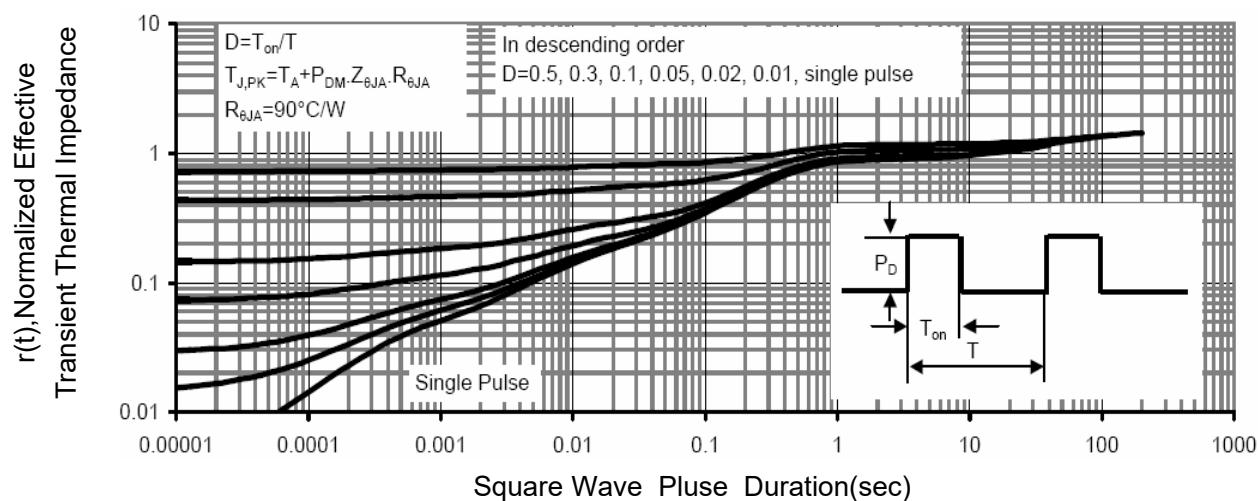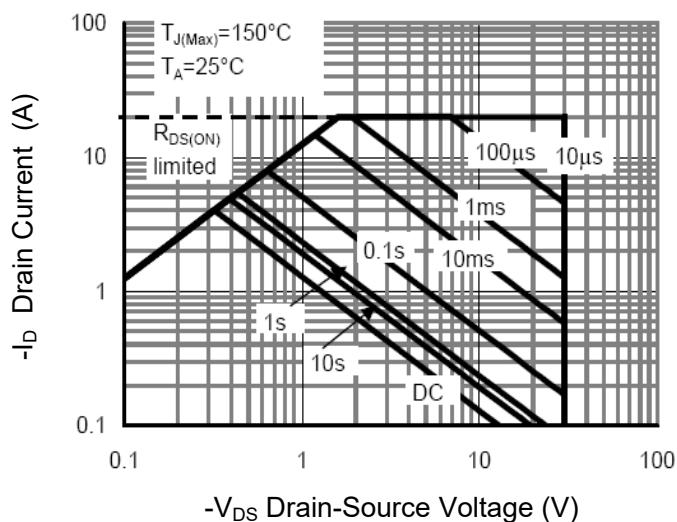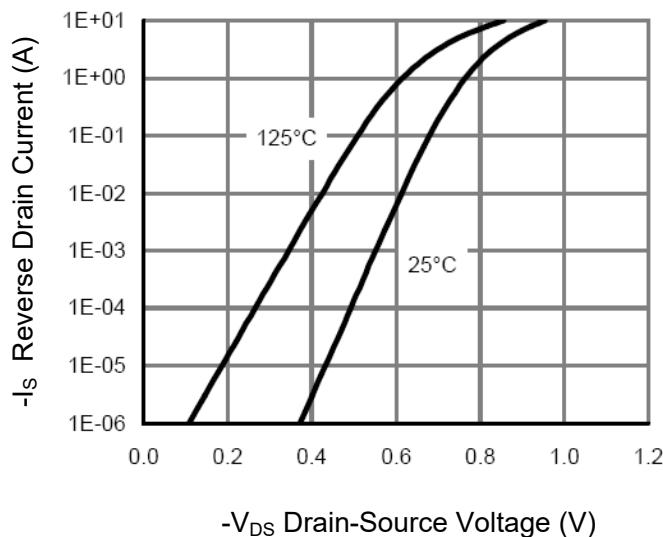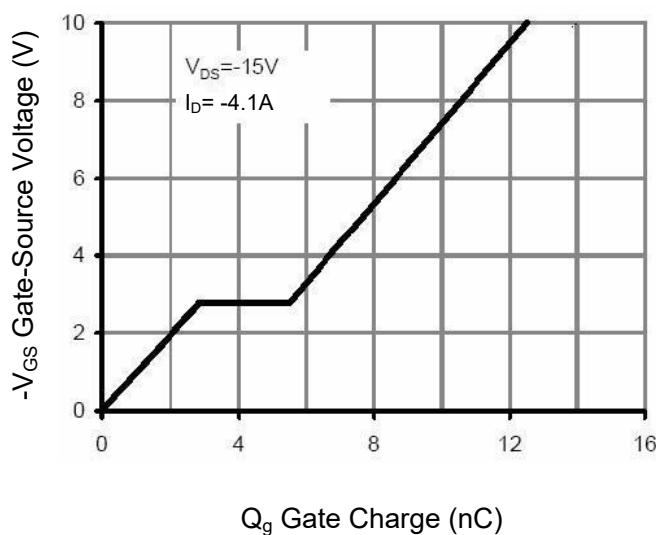






PJM04P30SG

P-Channel Enhancement Mode Power MOSFET

Package Outline

SOT-23-6

Dimensions in mm

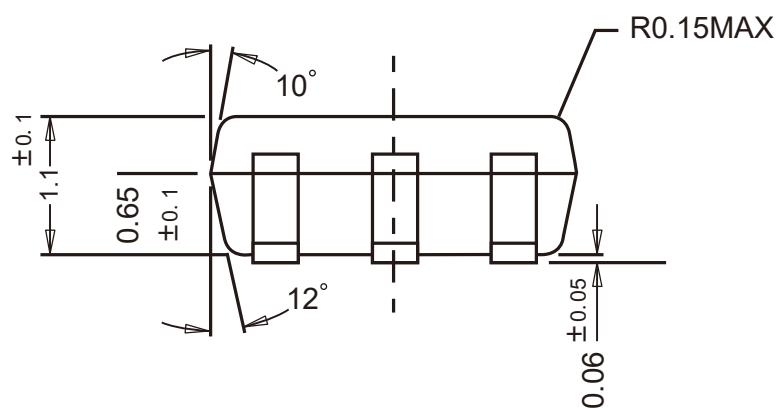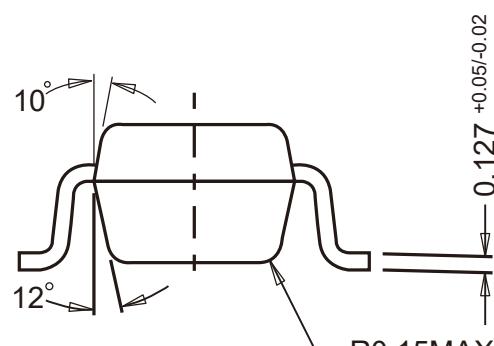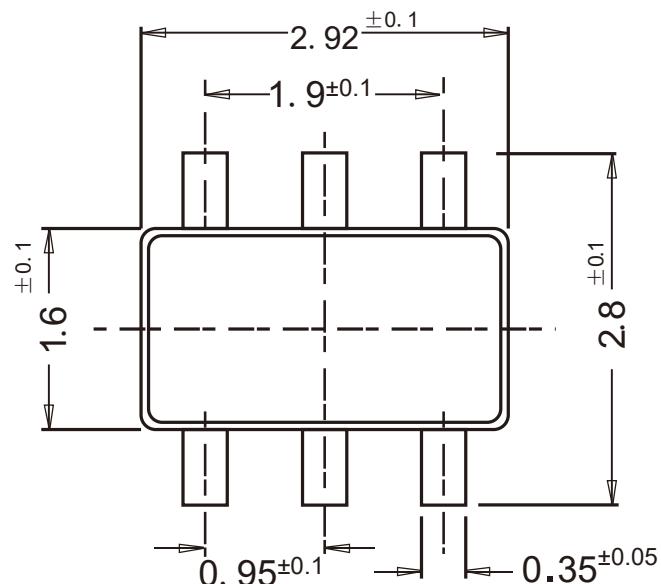


Ordering Information

Device	Package	Shipping
PJM04P30SG	SOT-23-6	3,000PCS/Reel&7inches



Conditions of Soldering and Storage

◆ Recommended condition of reflow soldering

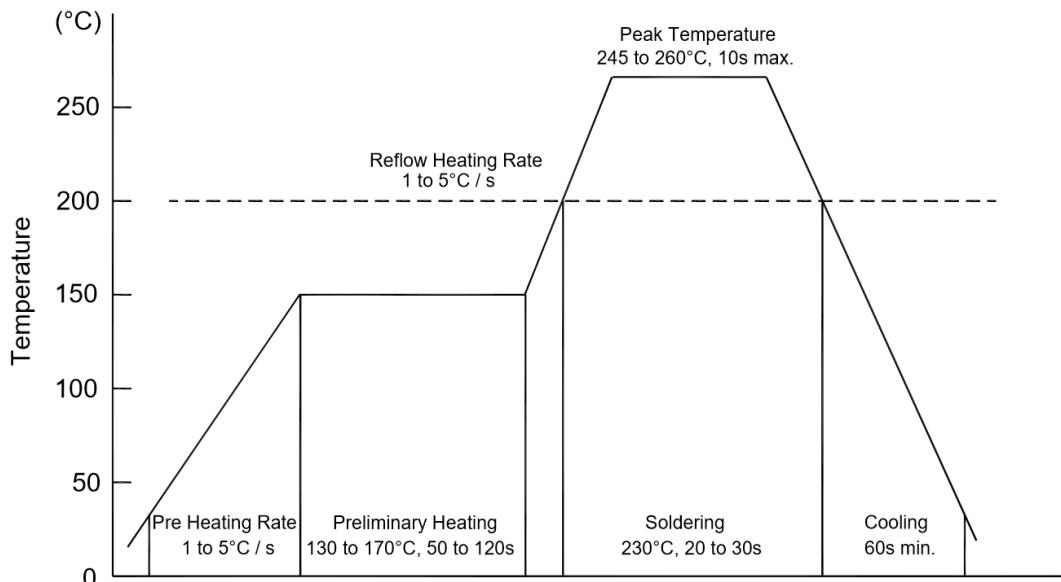

Recommended peak temperature is over 245 °C. If peak temperature is below 245 °C, you may adjust the following parameters:

- Time length of peak temperature (longer)
- Time length of soldering (longer)
- Thickness of solder paste (thicker)

◆ Conditions of hand soldering

- Temperature: 370 °C
- Time: 3s max.
- Times: one time


◆ Storage conditions

- **Temperature**
5 to 40 °C
- **Humidity**
30 to 80% RH
- **Recommended period**
One year after manufacturing




Package Specifications

- The method of packaging

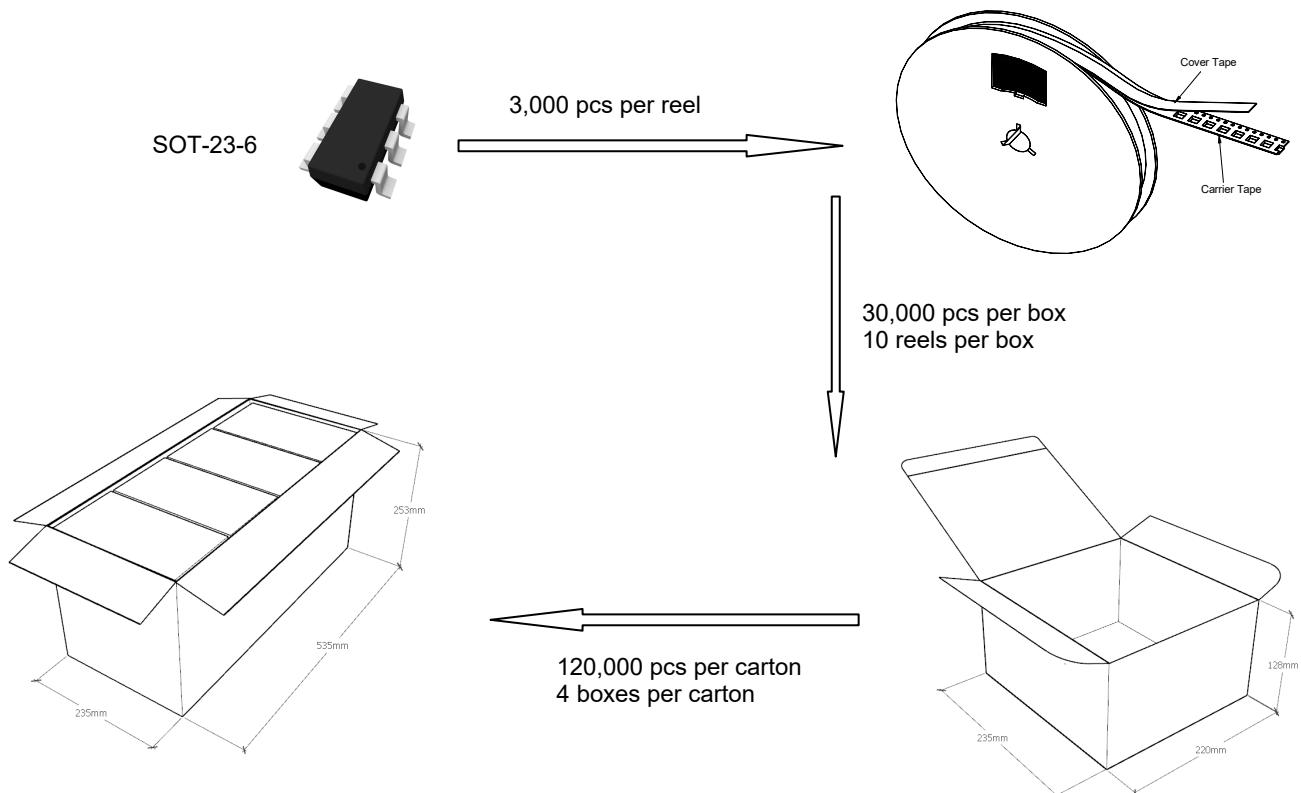


◆ Embossed tape and reel data

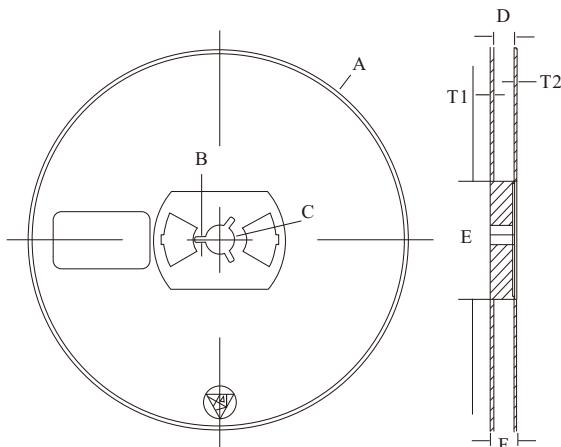

Symbol	Value (unit: mm)
A	$\varnothing 177.8 \pm 1$
B	2.7 ± 0.2
C	$\varnothing 13.5 \pm 0.2$
E	$\varnothing 54.5 \pm 0.2$
F	12.3 ± 0.3
D	$9.6 +2/-0.3$
T1	1.0 ± 0.2
T2	1.2 ± 0.2

Reel (7")

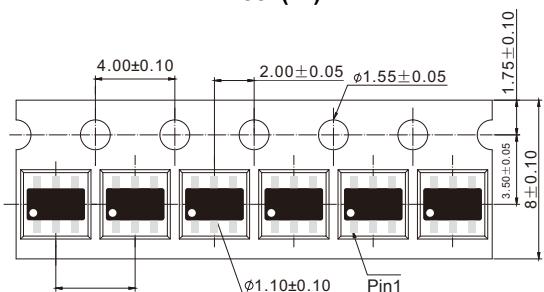

Tape (8mm)