




# PJM20N30SQ

## N-Channel Enhancement Mode Power MOSFET

### Product Summary

- $V_{DS} = 30V, I_D = 20A$
- $R_{DS(on)} < 20m\Omega @ V_{GS} = 10V$
- $R_{DS(on)} < 30m\Omega @ V_{GS} = 4.5V$

SOT-89

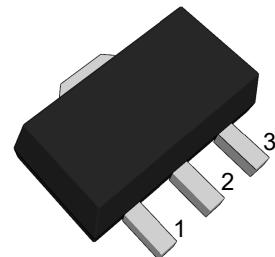

(Top View)

### Features

- Advanced Trench Technology
- RoHS and Reach Compliant
- Halogen and Antimony Free
- Moisture Sensitivity Level 1



### Application

- Power Switching Application
- Uninterruptible Power Supply

Pin	Description
1	Gate
2	Drain
3	Source

### Schematic Diagram

### Marking Code

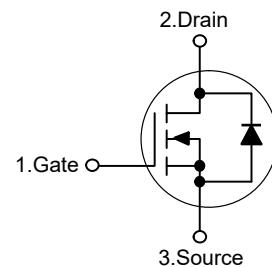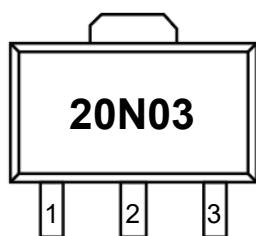

### Absolute Maximum Ratings

(Ta=25°C unless otherwise specified)

Parameter	Symbol	Value	Unit
Drain-Source Voltage	$V_{DS}$	30	V
Gate-Source Voltage	$V_{GS}$	$\pm 16$	V
Drain Current-Continuous <sup>Note1</sup>	$I_D$	20	A
Drain Current-Pulsed <sup>Note2</sup>	$I_{DM}$	80	A
Maximum Power Dissipation	$P_D$	1.5	W
Junction Temperature	$T_J$	150	°C
Storage Temperature Range	$T_{STG}$	-55 to +150	°C

### Thermal Characteristics

Thermal Resistance, Junction-to-Ambient <sup>Note3</sup>	$R_{eJA}$	83	°C/W
--	-----------	----	------



# PJM20N30SQ


## N-Channel Enhancement Mode Power MOSFET

### Electrical Characteristics

(Ta=25°C unless otherwise specified)

Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Unit
<b>Static Characteristics</b>						
Drain-Source Breakdown Voltage	V <sub>(BR)DSS</sub>	V <sub>GS</sub> =0V, I <sub>D</sub> =250μA	30	--	--	V
Zero Gate Voltage Drain Current	I <sub>DSS</sub>	V <sub>DS</sub> =30V, V <sub>GS</sub> =0V	--	--	1	μA
Gate-Body Leakage Current	I <sub>GSS</sub>	V <sub>GS</sub> =±16V, V <sub>DS</sub> =0V	--	--	±100	nA
Gate Threshold Voltage <sup>Note4</sup>	V <sub>GS(th)</sub>	V <sub>DS</sub> =V <sub>GS</sub> , I <sub>D</sub> =250μA	0.5	0.85	1.5	V
Drain-Source On-Resistance <sup>Note4</sup>	R <sub>DS(on)</sub>	V <sub>GS</sub> =10V, I <sub>D</sub> =8A	--	10	20	mΩ
		V <sub>GS</sub> =4.5V, I <sub>D</sub> =8A	--	15	30	mΩ
Forward Transconductance <sup>Note4</sup>	g <sub>FS</sub>	V <sub>DS</sub> =5V, I <sub>D</sub> =1A	--	9	--	S
<b>Dynamic Characteristics</b>						
Input Capacitance	C <sub>iss</sub>	V <sub>DS</sub> =25V, V <sub>GS</sub> =0V, f=1MHz	--	530	--	pF
Output Capacitance	C <sub>oss</sub>		--	200	--	pF
Reverse Transfer Capacitance	C <sub>rss</sub>		--	60	--	pF
Total Gate Charge	Q <sub>g</sub>	V <sub>DD</sub> =15V, I <sub>D</sub> =15A, V <sub>GS</sub> =10V	--	8.4	--	nC
Gate-Source Charge	Q <sub>gs</sub>		--	2.5	--	nC
Gate-Drain Charge	Q <sub>gd</sub>		--	6.4	--	nC
<b>Switching Characteristics</b>						
Turn-on Delay Time	t <sub>d(on)</sub>	V <sub>DD</sub> =15V, I <sub>D</sub> =15A V <sub>GS</sub> =10V, R <sub>GEN</sub> =12.7Ω	--	6.2	--	nS
Turn-on Rise Time	t <sub>r</sub>		--	11	--	nS
Turn-off Delay Time	t <sub>d(off)</sub>		--	23	--	nS
Turn-off Fall Time	t <sub>f</sub>		--	18	--	nS
<b>Source-Drain Diode Characteristics</b>						
Diode Forward Voltage <sup>Note4</sup>	V <sub>SD</sub>	V <sub>GS</sub> =0V, I <sub>s</sub> =15A	--	--	1.2	V
Diode Forward Current <sup>Note3</sup>	I <sub>s</sub>		--	--	15	A







- Note: 1. Calculated continuous current based on maximum allowable junction temperature. The package limitation current is 15A.  
2. Pulse width limited by safe operating area.  
3. Surface Mounted on FR4 Board, t ≤ 10 sec.  
4. Pulse Test: Pulse width≤300μs, duty cycle≤2%.



# PJM20N30SQ

## N-Channel Enhancement Mode Power MOSFET

### Typical Characteristic Curves

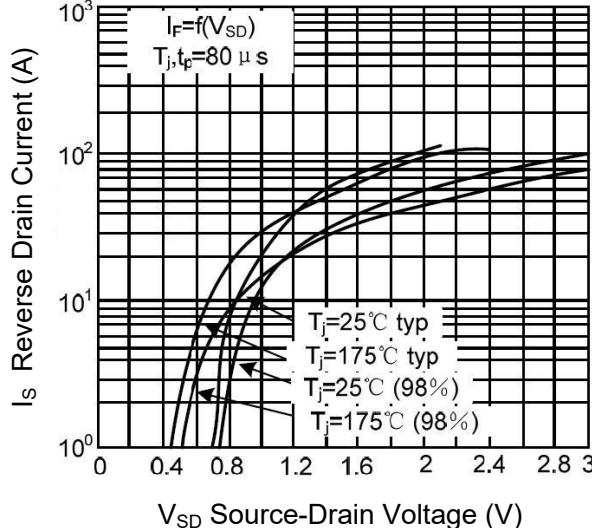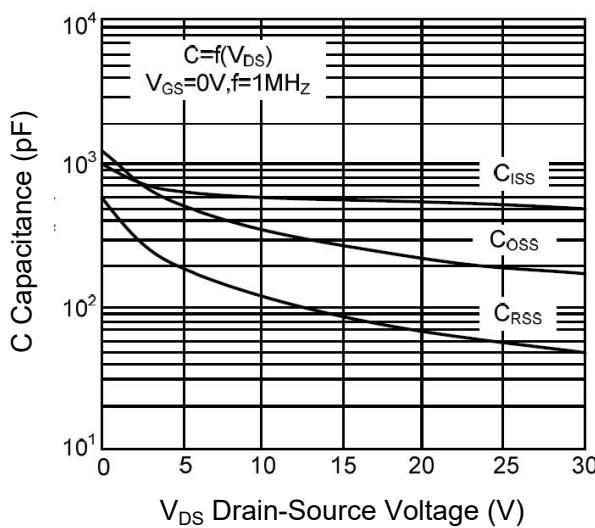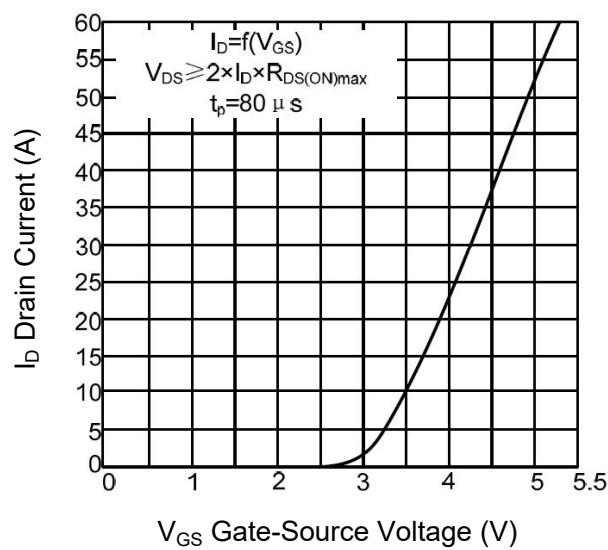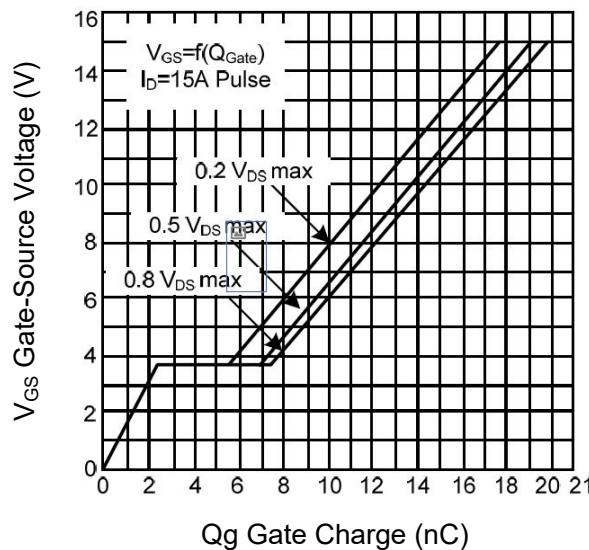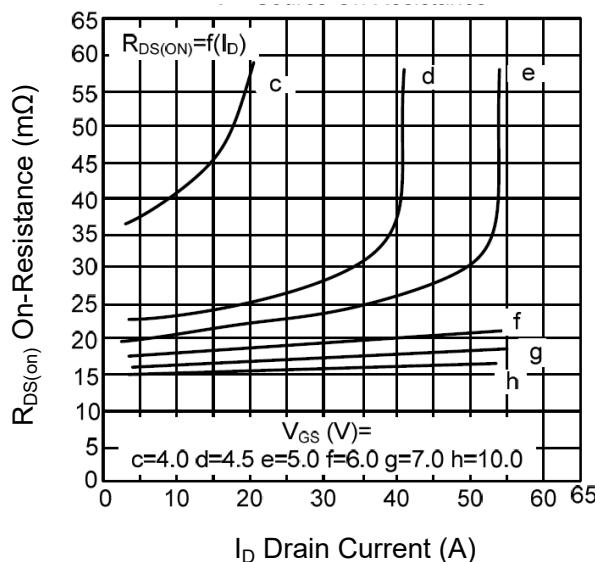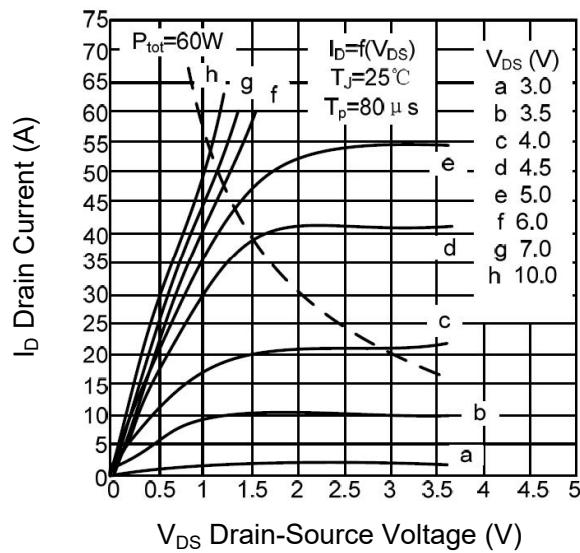




### Package Outline

SOT-89

Dimensions in mm

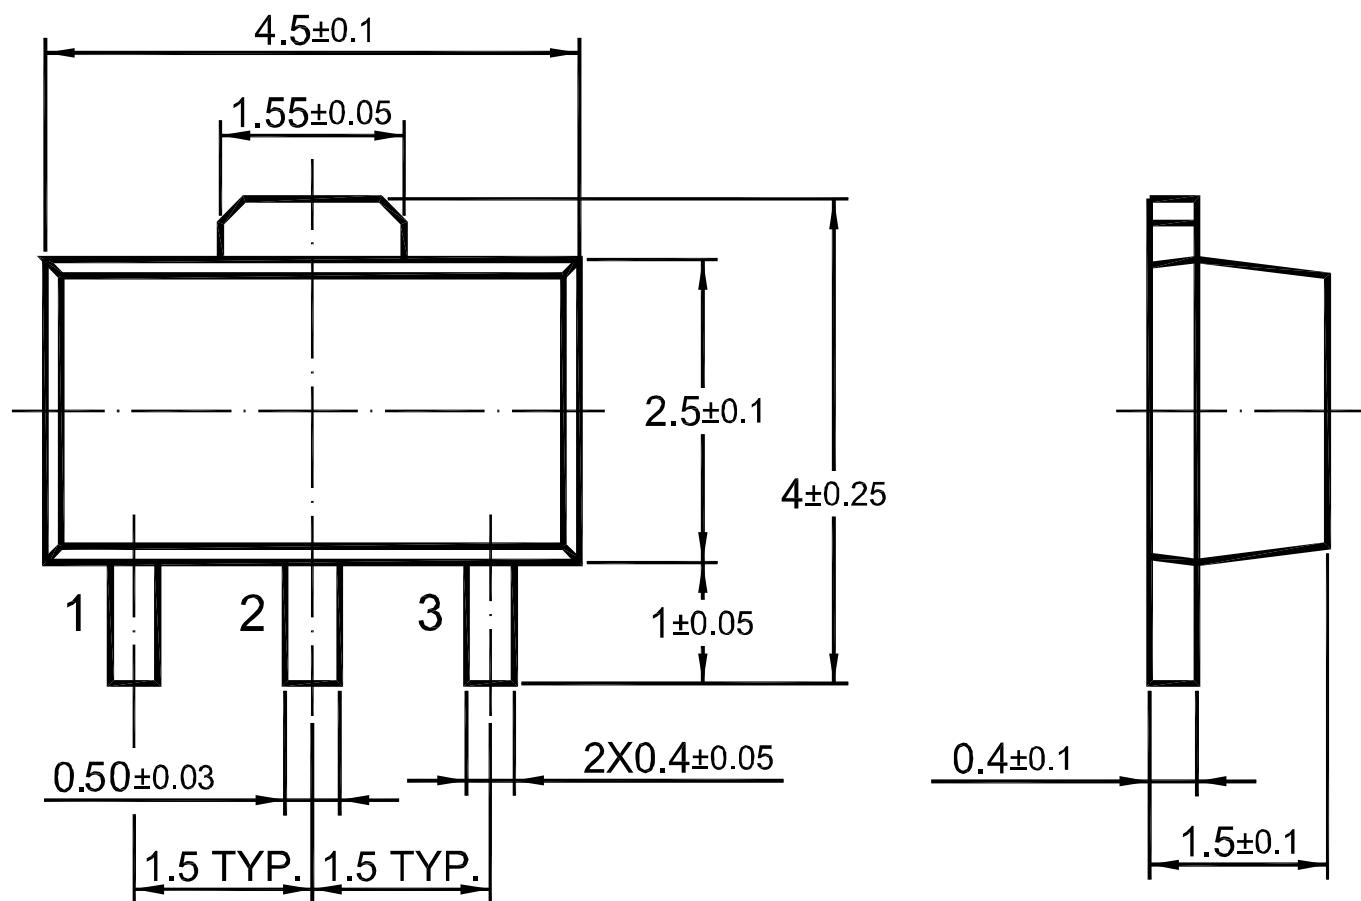


### Ordering Information

Device	Package	Shipping
PJM20N30SQ	SOT-89	1,000PCS/Reel&7inches
		3,000PCS/Reel&13inches



## Conditions of Soldering and Storage

### ◆ Recommended condition of reflow soldering

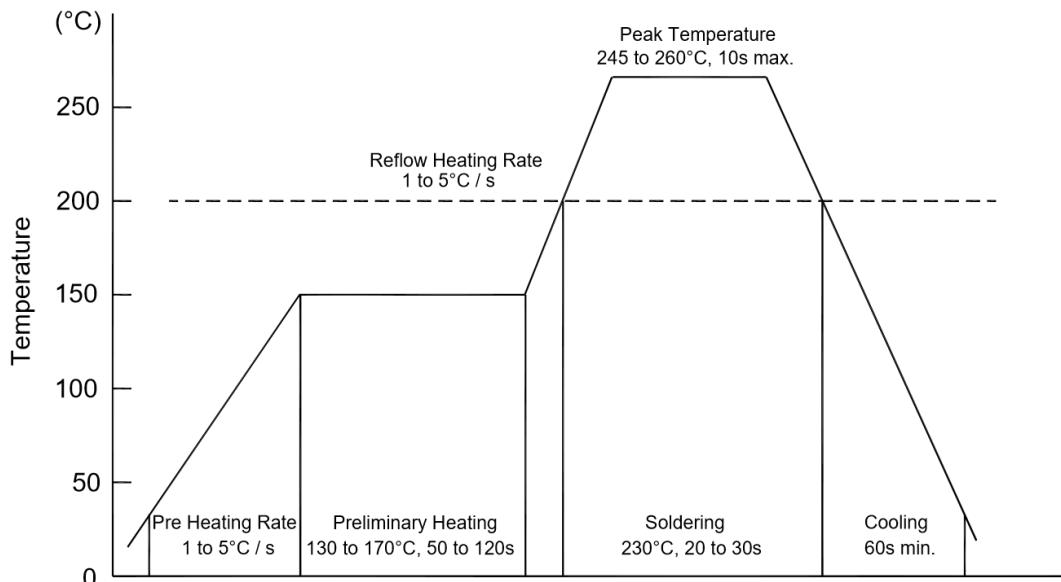

Recommended peak temperature is over 245 °C. If peak temperature is below 245 °C, you may adjust the following parameters:

- Time length of peak temperature (longer)
- Time length of soldering (longer)
- Thickness of solder paste (thicker)

### ◆ Conditions of hand soldering

- Temperature: 370 °C
- Time: 3s max.
- Times: one time


### ◆ Storage conditions

- **Temperature**  
5 to 40 °C
- **Humidity**  
30 to 80% RH
- **Recommended period**  
One year after manufacturing




## Package Specifications


- The method of packaging (1,000PCS/Reel&7inches)

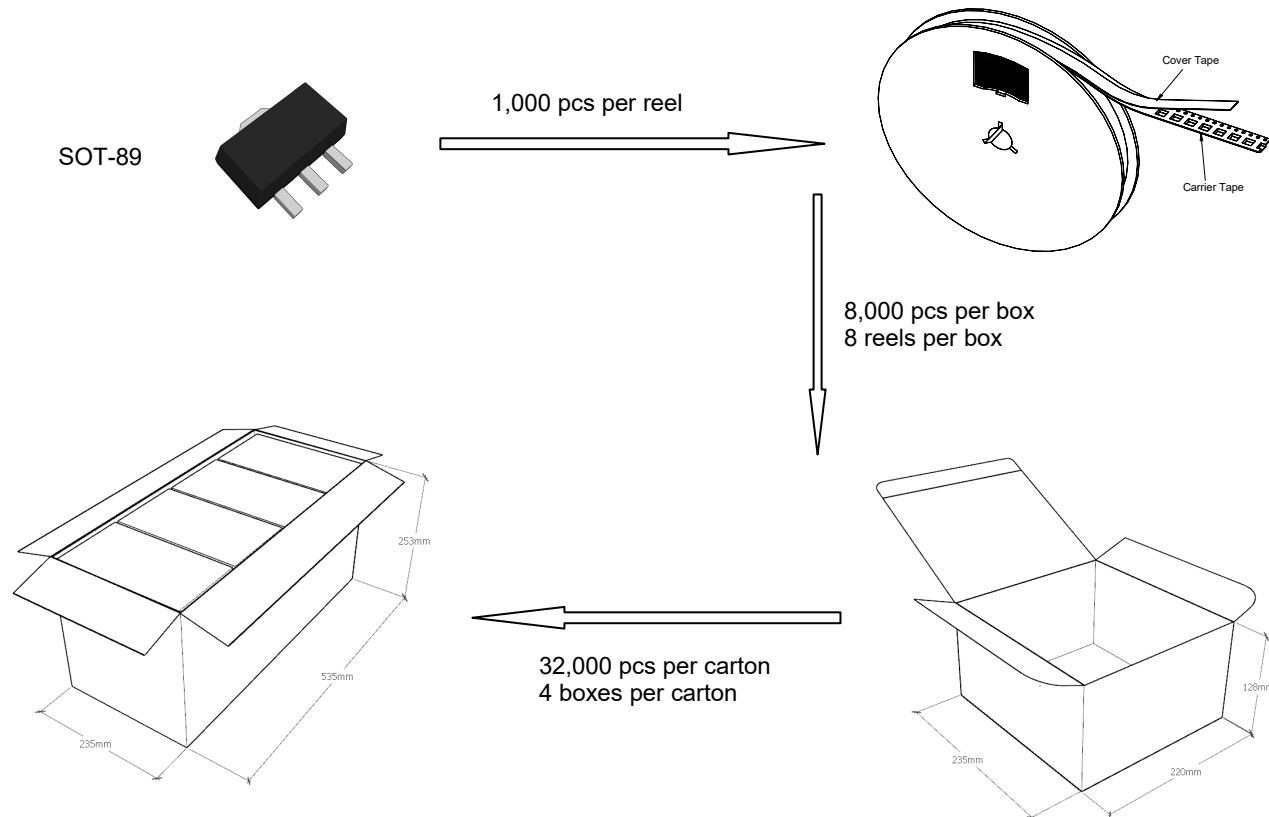


### ◆ Embossed tape and reel data

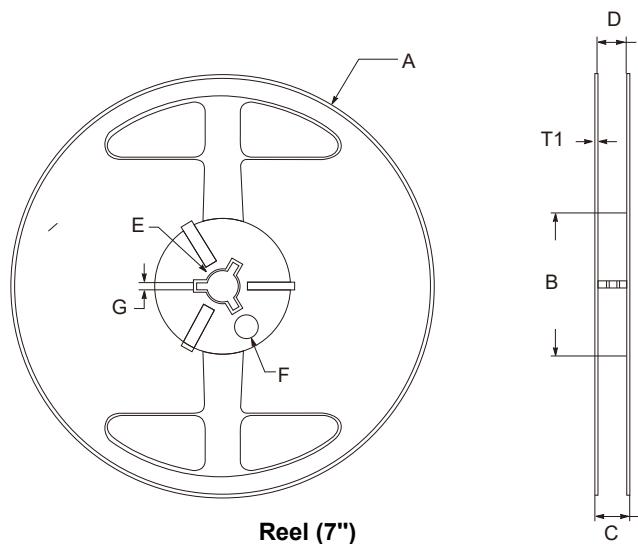

symbol	Value(unit:mm)
A	$\Phi 179 \pm 1$
B	60.5 $\pm 0.2$
C	15.3 $\pm 0.3$
D	12.5~13.7
E	$\Phi 13.5 \pm 0.2$
F	$\Phi 10.0 \pm 0.2$
G	2.7 $\pm 0.2$
T1	1.0 $\pm 0.2$

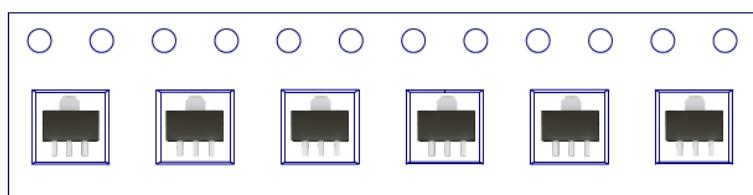




# PJM20N30SQ


## N-Channel Enhancement Mode Power MOSFET

### Package Specifications

- The method of packaging (3,000PCS/Reel&13inches)

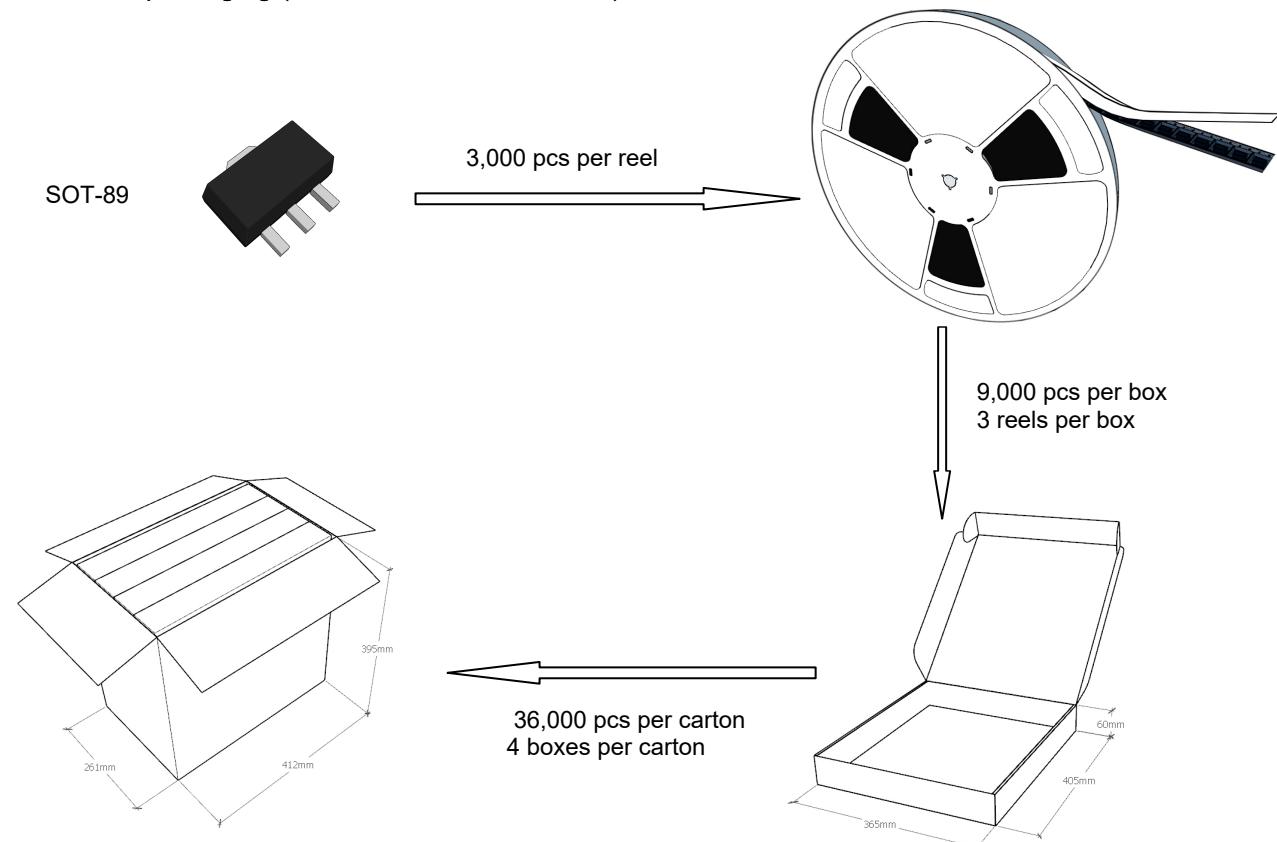

### ◆ Embossed tape and reel data

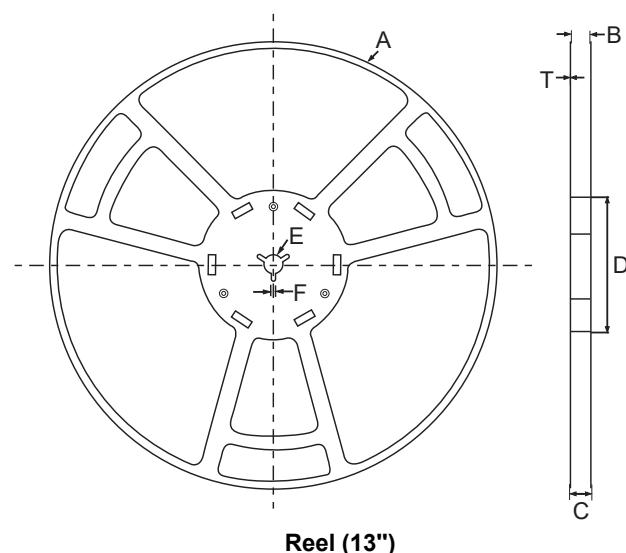

symbol	Value(unit:mm)
A	$\Phi 330 \pm 1$
B	$12.7 \pm 0.5$
C	$16.5 \pm 0.3$
D	$\Phi 99.5 \pm 0.5$
E	$\Phi 13.6 \pm 0.3$
F	$2.8 \pm 0.3$
T1	$1.9 \pm 0.2$

