


PJM65H07NTE

N-Channel Enhancement Mode Power MOSFET

Features

- Fast Switching
- Low Gate Charge and $R_{DS(on)}$
- Low Reverse transfer capacitances
- $V_{DS} = 650V, I_D = 7A$
 $R_{DS(on)} < 1.15\Omega @ V_{GS} = 10V$

TO-252

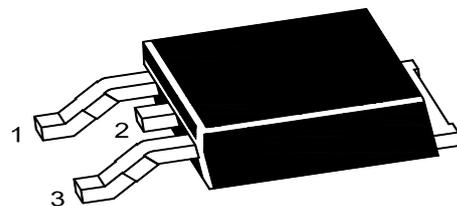


1. Gate 2. Drain 3. Source

Applications

- Power switch circuit of adaptor and charger

Schematic Diagram




Absolute Maximum Ratings

Ratings at 25°C ambient temperature unless otherwise specified.

Parameter	Symbol	Value	Unit
Drain-Source Voltage	V_{DS}	650	V
Gate-Source Voltage	V_{GS}	± 30	V
Drain Current-Continuous	I_D	7	A
Drain Current-Pulsed ^{Note1}	I_{DM}	28	A
Single pulse avalanche energy ^{Note4}	E_{AS}	450	mJ
Maximum Power Dissipation	P_D	95	W
Junction Temperature	T_J	150	°C
Storage Temperature Range	T_{STG}	-55 to +150	°C

Thermal Characteristics

Thermal Resistance, Junction-to-Ambient ^{Note2}	$R_{\theta JA}$	62	°C/W
Maximum Junction-to-Case ^{Note2}	$R_{\theta JC}$	1.32	°C/W



PJM65H07NTE

N-Channel Enhancement Mode Power MOSFET

Electrical Characteristics

(Ta=25°C unless otherwise specified)

Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Static Characteristics						
Drain-Source Breakdown Voltage	$V_{(BR)DSS}$	$V_{GS}=0V, I_D=250\mu A$	650	--	--	V
Zero Gate Voltage Drain Current	I_{DSS}	$V_{DS}=650V, V_{GS}=0V$	--	--	1	μA
Gate-Body Leakage Current	I_{GSS}	$V_{GS}=\pm 30V, V_{DS}=0V$	--	--	± 100	nA
Gate Threshold Voltage ^{Note3}	$V_{GS(th)}$	$V_{DS}=V_{GS}, I_D=250\mu A$	2	--	4	V
Drain-Source On-Resistance ^{Note3}	$R_{DS(on)}$	$V_{GS}=10V, I_D=3A$	--	0.95	1.15	Ω
Forward Transconductance ^{Note3}	g_{FS}	$V_{DS}=15V, I_D=3A$	--	6.5	--	S
Dynamic Characteristics						
Input Capacitance	C_{iss}	$V_{DS}=25V, V_{GS}=0V, f=1MHz$	--	1050	--	pF
Output Capacitance	C_{oss}		--	90	--	pF
Reverse Transfer Capacitance	C_{rss}		--	4.5	--	pF
Switching Characteristics						
Turn-on Delay Time	$t_{d(on)}$	$V_{DD}=325V, I_D=7A$ $V_{GS}=10V, R_G=9.1\Omega$	--	11	--	nS
Turn-on Rise Time	t_r		--	10	--	nS
Turn-off Delay Time	$t_{d(off)}$		--	36	--	nS
Turn-off Fall Time	t_f		--	18	--	nS
Total Gate Charge	Q_g	$V_{DD}=325V, I_D=7A, V_{GS}=10V$	--	24	--	nC
Gate-Source Charge	Q_{gs}		--	5	--	nC
Gate-Drain Charge	Q_{gd}		--	8	--	nC
Source-Drain Diode Characteristics						
Diode Forward Voltage ^{Note3}	V_{SD}	$V_{GS}=0V, I_S=7A$	--	--	1.5	V
Diode Forward Current ^{Note2}	I_S		--	--	7	A






- Note: 1. Repetitive Rating: Pulse width limited by maximum junction temperature.
2. Surface Mounted on FR4 Board, $t \leq 10$ sec.
3. Pulse Test: Pulse width $< 380\mu s$, duty cycle $< 2\%$
4. E_{AS} condition : $L=10mH, I_D=9.5A$, start $T_J=25^\circ C$.



PJM65H07NTE

N-Channel Enhancement Mode Power MOSFET






Typical Characteristic Curves

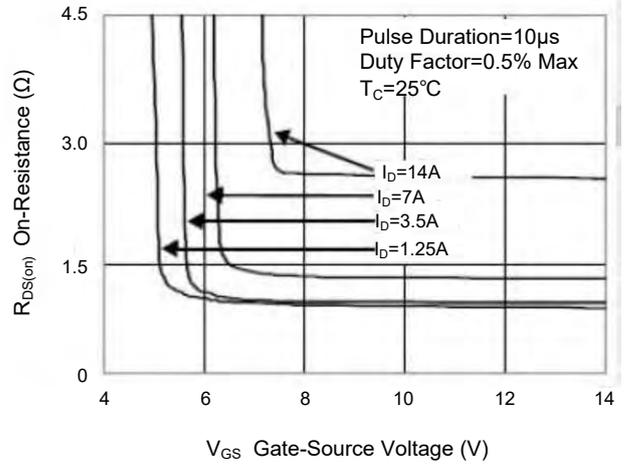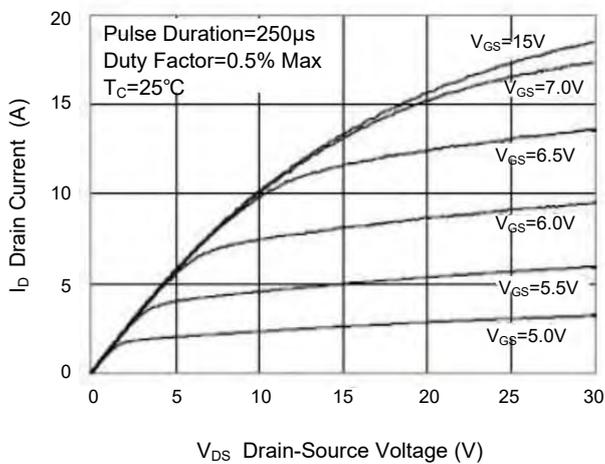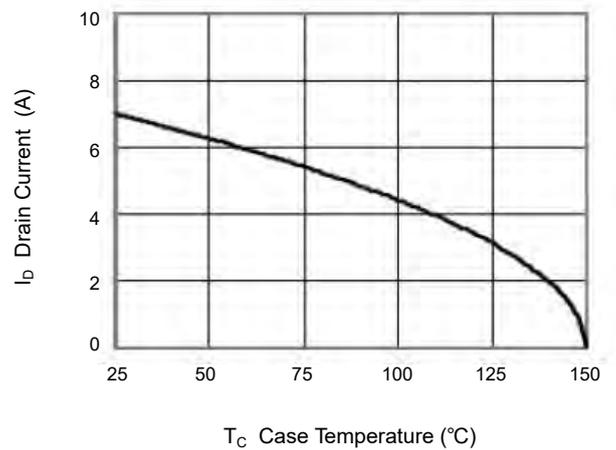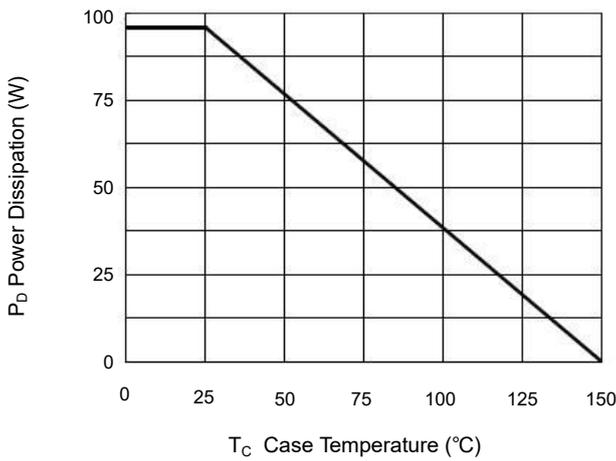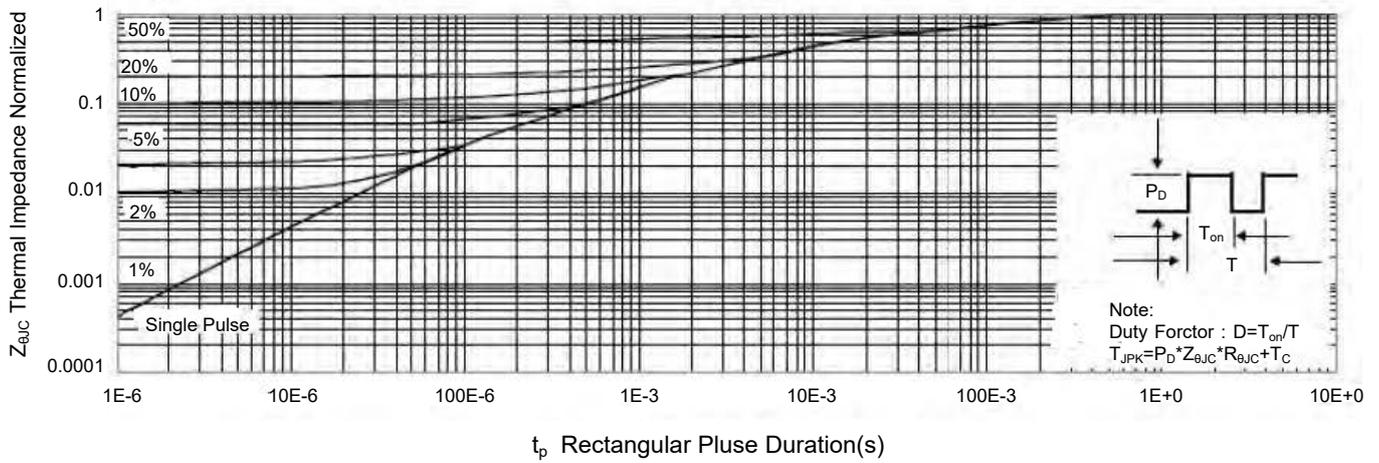




PJM65H07NTE







N-Channel Enhancement Mode Power MOSFET

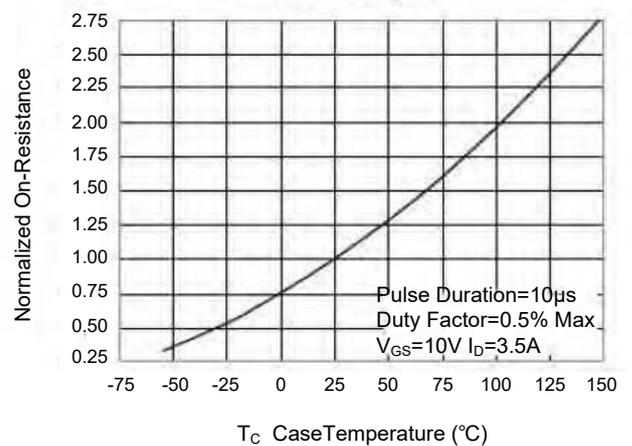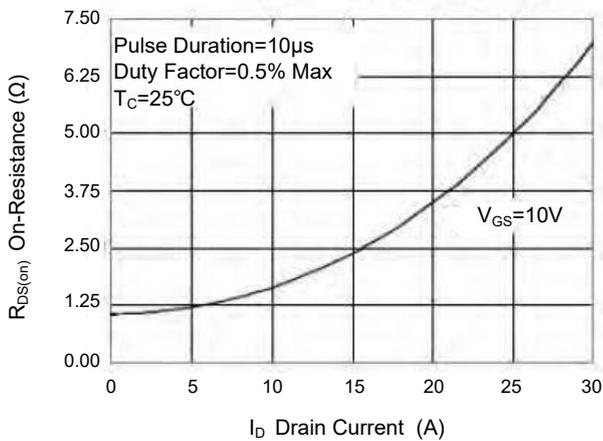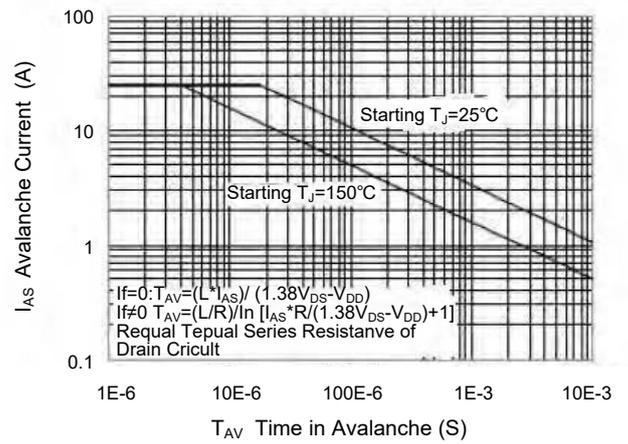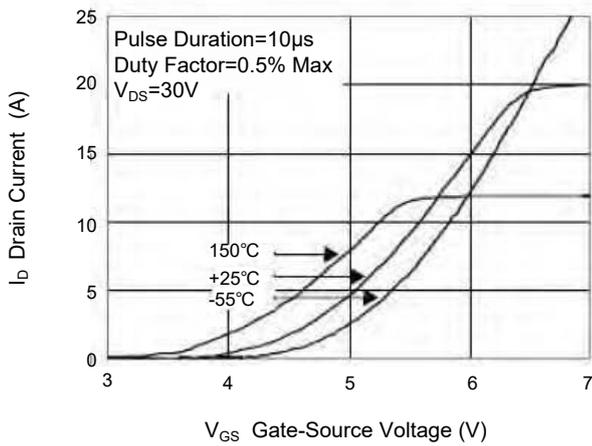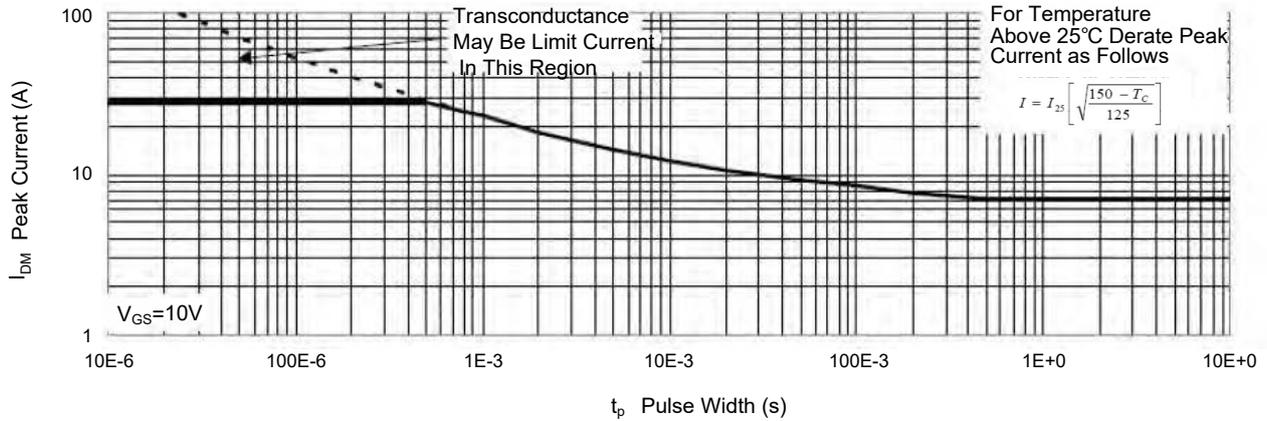



PJM65H07NTE

N-Channel Enhancement Mode Power MOSFET

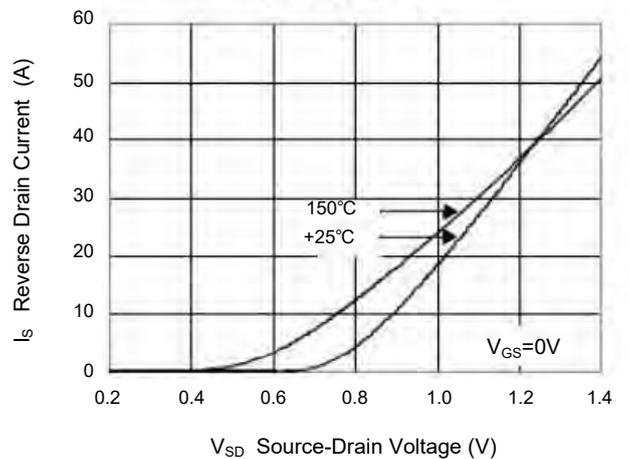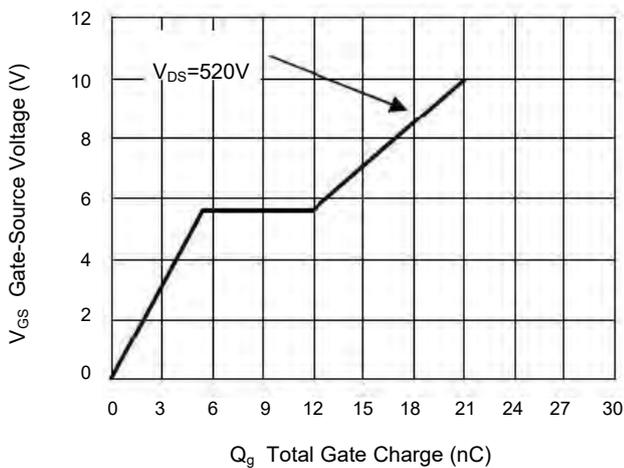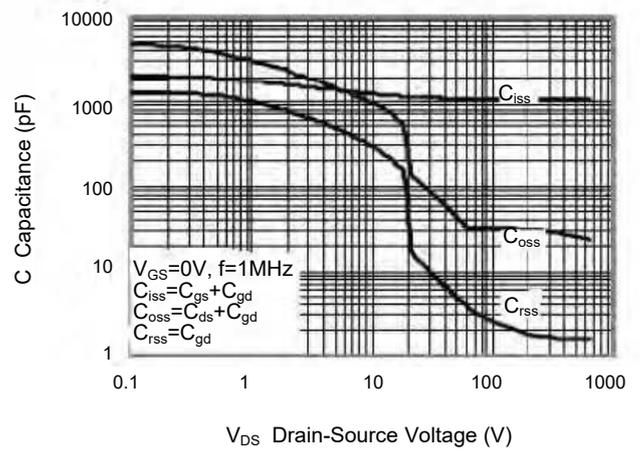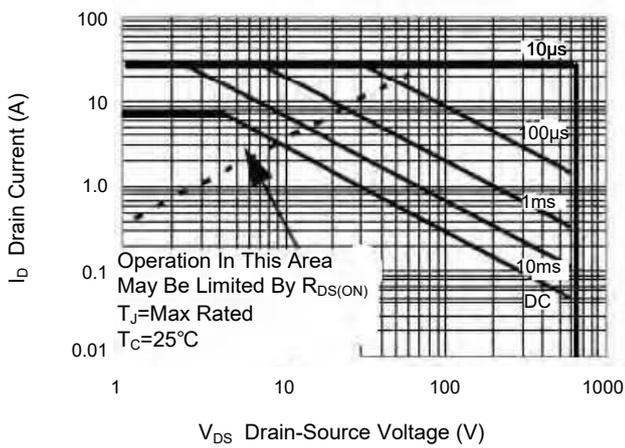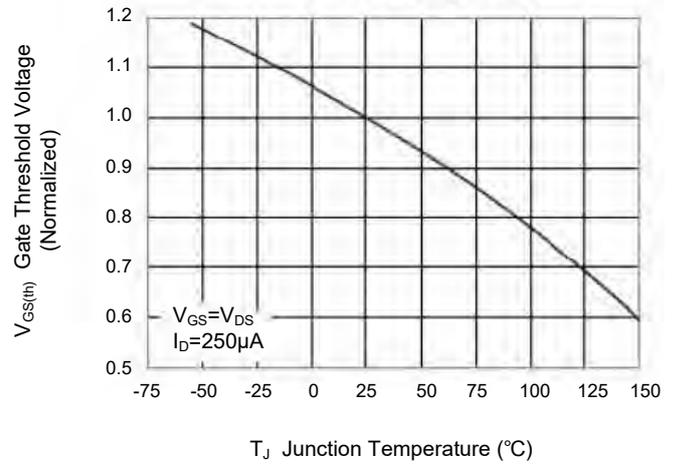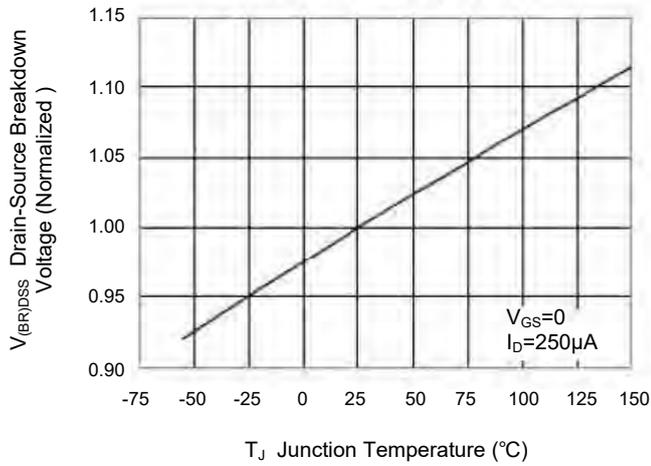



PJM65H07NTE

N-Channel Enhancement Mode Power MOSFET

Package Outline

TO-252

Dimensions in mm

