



PJM8205DNSG

Dual N-Channel Enhancement Mode Power MOSFET

Product Summary

- $V_{DS} = 20V, I_D = 5A$
- $R_{DS(on)} < 25m\Omega @ V_{GS} = 4.5V$
- $R_{DS(on)} < 32m\Omega @ V_{GS} = 2.5V$


Features

- Advanced Trench Technology
- RoHS and Reach Compliant
- Halogen and Antimony Free
- Moisture Sensitivity Level 3


Application

- Load Switch
- PWM Applications
- Power Management

Marking Code




SOT-23-6

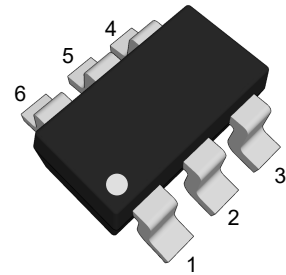

(Top View)

| Pin | Description | Pin | Description |
|-----|---------------|-----|---------------|
| 1 | Source1 | 4 | Gate2 |
| 2 | Drain1/Drain2 | 5 | Drain1/Drain2 |
| 3 | Source2 | 6 | Gate1 |

Schematic Diagram

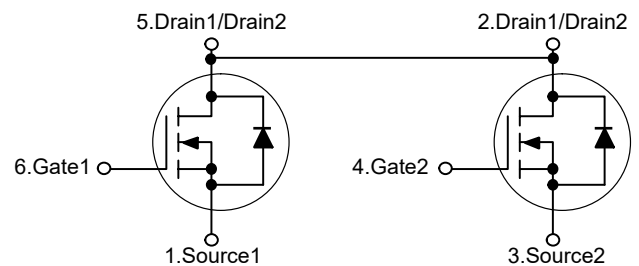

Absolute Maximum Ratings

Ratings at 25°C ambient temperature unless otherwise specified.

| Parameter | Symbol | Value | Unit |
|---------------------------------------|-----------|-------------|------|
| Drain-Source Voltage | V_{DS} | 20 | V |
| Gate-Source Voltage | V_{GS} | ± 12 | V |
| Drain Current-Continuous | I_D | 5 | A |
| Drain Current-Pulsed ^{Note1} | I_{DM} | 25 | A |
| Maximum Power Dissipation | P_D | 1.25 | W |
| Junction Temperature | T_J | 150 | °C |
| Storage Temperature Range | T_{STG} | -55 to +150 | °C |

Thermal Characteristics

| | | | |
|--|-----------------|-----|------|
| Thermal Resistance, Junction-to-Ambient ^{Note2} | $R_{\theta JA}$ | 100 | °C/W |
|--|-----------------|-----|------|



PJM8205DNSG

Dual N-Channel Enhancement Mode Power MOSFET

Electrical Characteristics







(Ta=25°C unless otherwise specified)

| Parameter | Symbol | Test Condition | Min. | Typ. | Max. | Unit |
|---|---------------|---|------|------|-----------|------------|
| Static Characteristics | | | | | | |
| Drain-Source Breakdown Voltage | $V_{(BR)DSS}$ | $V_{GS}=0V, I_D=250\mu A$ | 20 | -- | -- | V |
| Zero Gate Voltage Drain Current | I_{DSS} | $V_{DS}=20V, V_{GS}=0V$ | -- | -- | 1 | μA |
| Gate-Body Leakage Current | I_{GSS} | $V_{GS}=\pm 12V, V_{DS}=0V$ | -- | -- | ± 100 | nA |
| Gate Threshold Voltage ^{Note3} | $V_{GS(th)}$ | $V_{DS}=V_{GS}, I_D=250\mu A$ | 0.5 | 0.7 | 1.2 | V |
| Drain-Source On-Resistance ^{Note3} | $R_{DS(on)}$ | $V_{GS}=4.5V, I_D=5A$ | -- | 20 | 25 | m Ω |
| | | $V_{GS}=2.5V, I_D=4A$ | -- | 25 | 32 | m Ω |
| Forward Transconductance ^{Note3} | g_{FS} | $V_{DS}=5V, I_D=5A$ | -- | 10 | -- | S |
| Dynamic Characteristics | | | | | | |
| Input Capacitance | C_{iss} | $V_{DS}=10V, V_{GS}=0V, f=1MHz$ | -- | 550 | -- | pF |
| Output Capacitance | C_{oss} | | -- | 125 | -- | pF |
| Reverse Transfer Capacitance | C_{rss} | | -- | 64 | -- | pF |
| Total Gate Charge | Q_g | $V_{DS}=10V, I_D=5A,$ $V_{GS}=4.5V$ | -- | 9.5 | -- | nC |
| Gate-Source Charge | Q_{gs} | | -- | 2.1 | -- | nC |
| Gate-Drain Charge | Q_{gd} | | -- | 1.4 | -- | nC |
| Switching Characteristics | | | | | | |
| Turn-on Delay Time | $t_{d(on)}$ | $V_{DD}=10V, I_D=5A$ $V_{GS}=4V, R_{GEN}=10\Omega$ | -- | 9 | -- | nS |
| Turn-on Rise Time | t_r | | -- | 10 | -- | nS |
| Turn-off Delay Time | $t_{d(off)}$ | | -- | 32 | -- | nS |
| Turn-off Fall Time | t_f | | -- | 24 | -- | nS |
| Source-Drain Diode Characteristics | | | | | | |
| Diode Forward Voltage ^{Note3} | V_{SD} | $V_{GS}=0V, I_S=5A$ | -- | -- | 1.2 | V |
| Diode Forward Current ^{Note2} | I_S | | -- | -- | 5 | A |

- Note: 1. Repetitive Rating: Pulse width limited by maximum junction temperature.
2. Surface Mounted on FR4 Board, $t \leq 10$ sec.
3. Pulse Test: Pulse width $\leq 300\mu s$, duty cycle $\leq 2\%$.





Typical Characteristic Curves

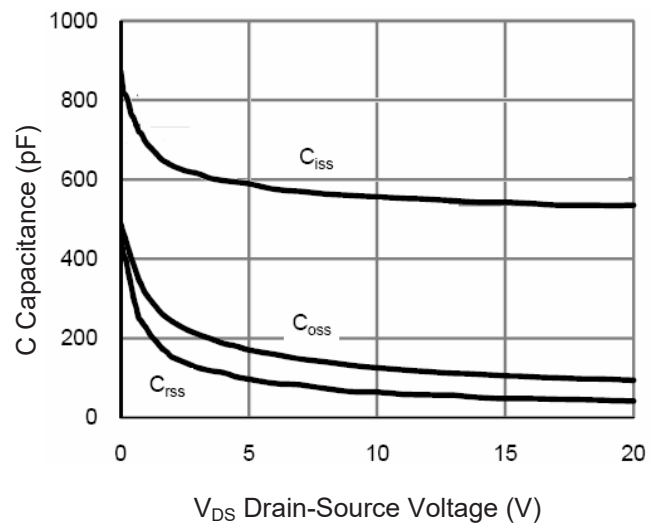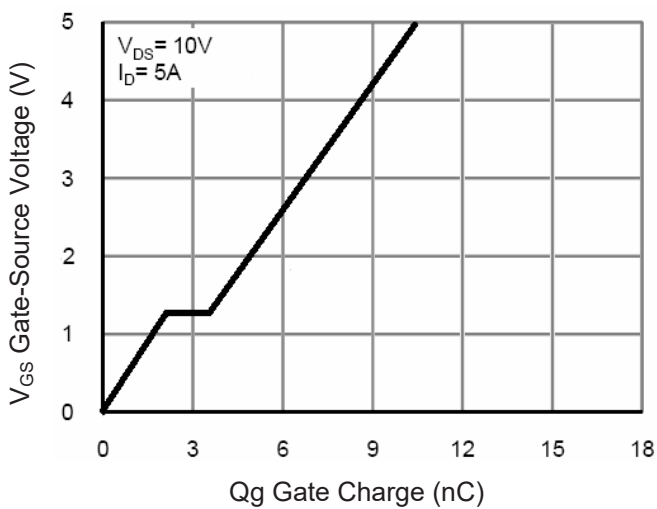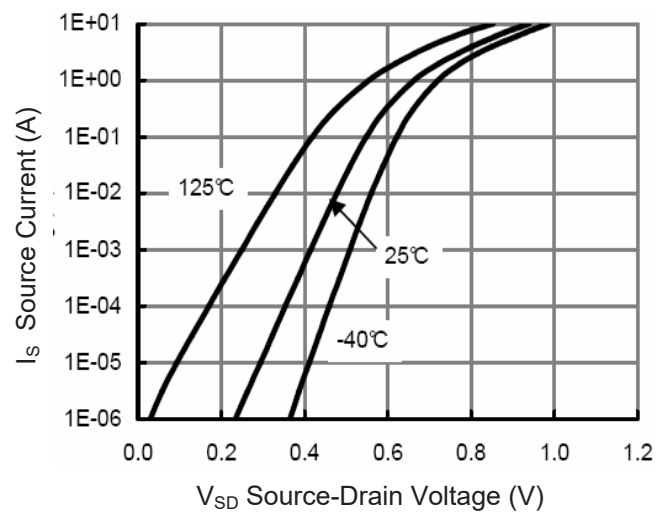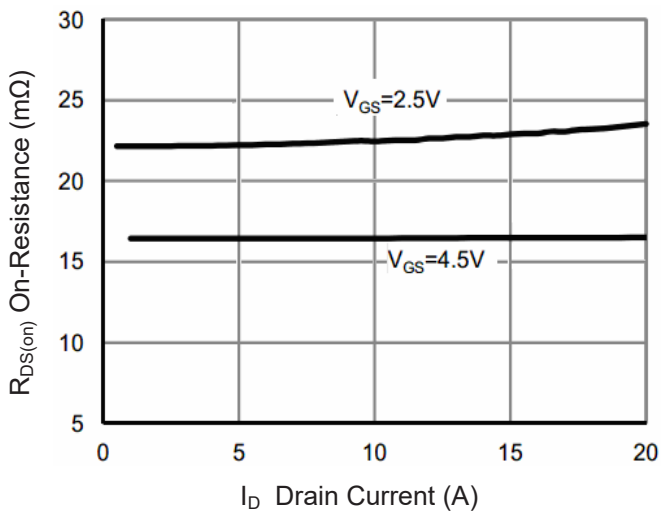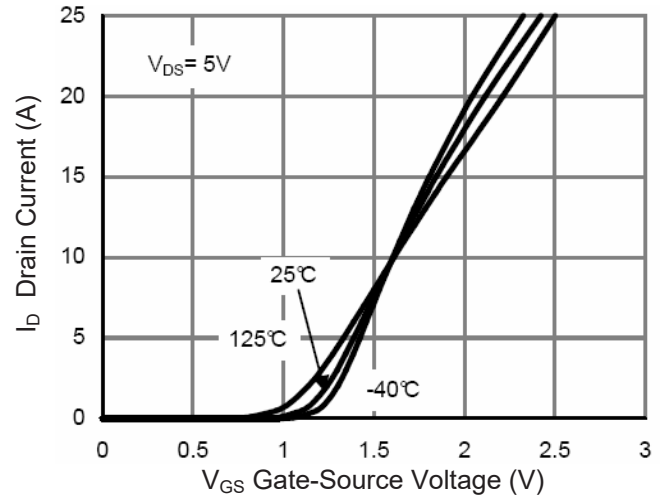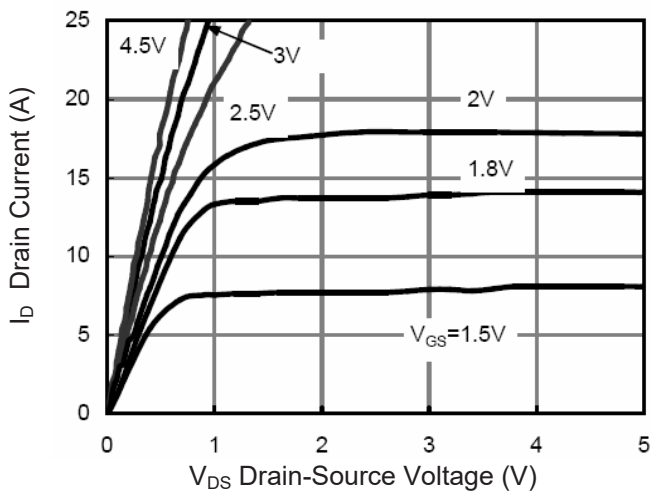



PJM8205DNSG

Dual N-Channel Enhancement Mode Power MOSFET

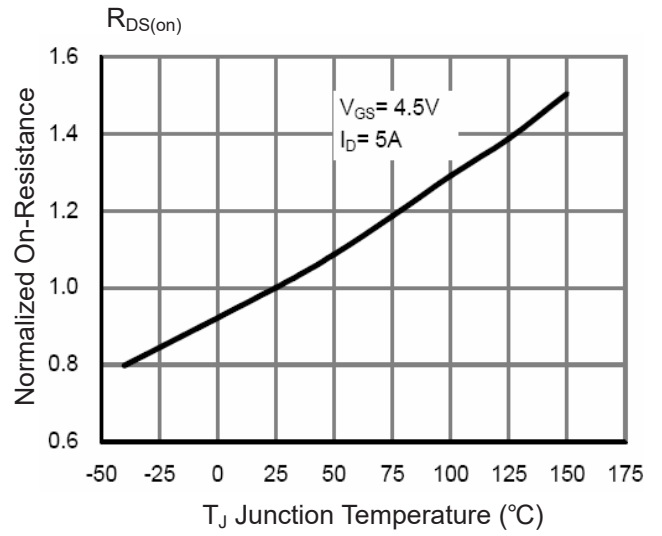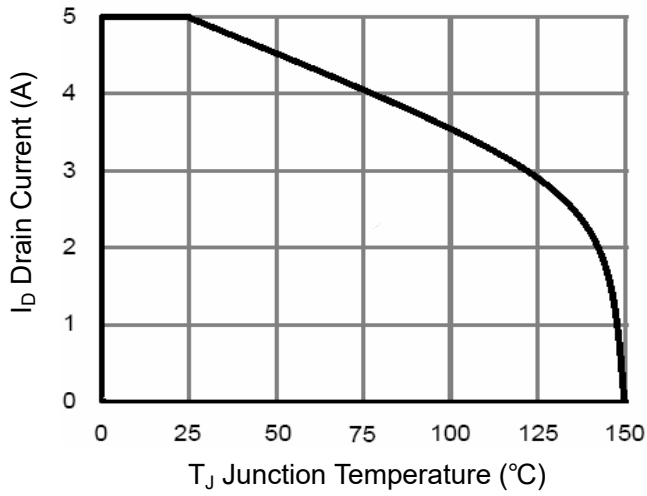




PJM8205DNSG

Dual N-Channel Enhancement Mode Power MOSFET

Package Outline

SOT-23-6

Dimensions in mm

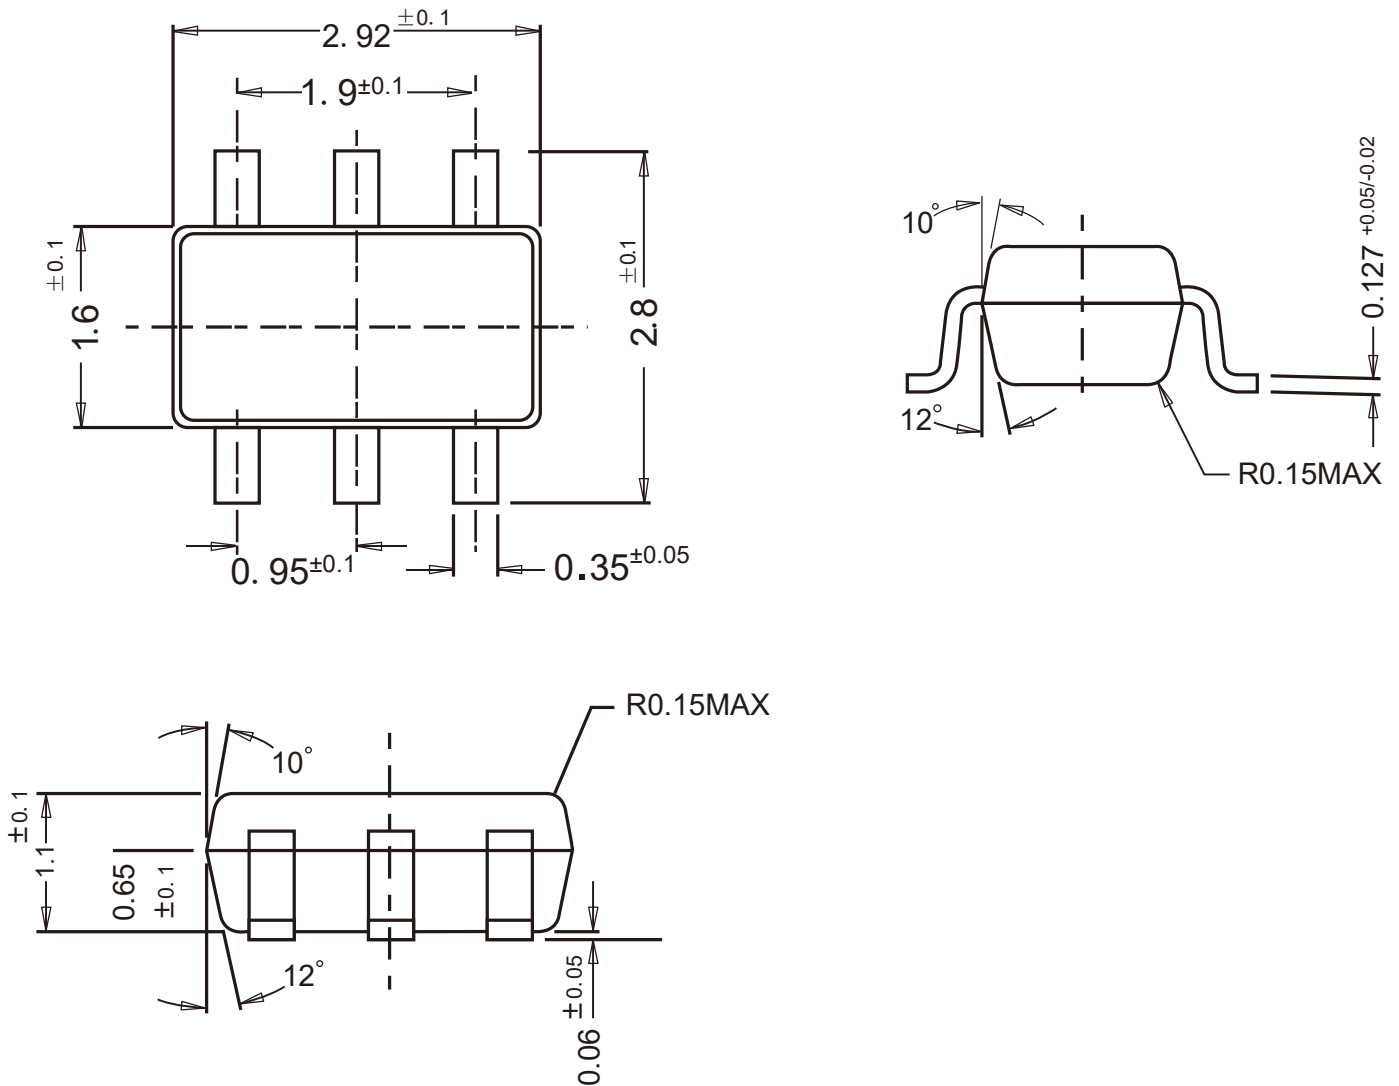


Ordering Information

| Device | Package | Shipping |
|-------------|----------|-----------------------|
| PJM8205DNSG | SOT-23-6 | 3,000PCS/Reel&7inches |



Conditions of Soldering and Storage

◆ Recommended condition of reflow soldering

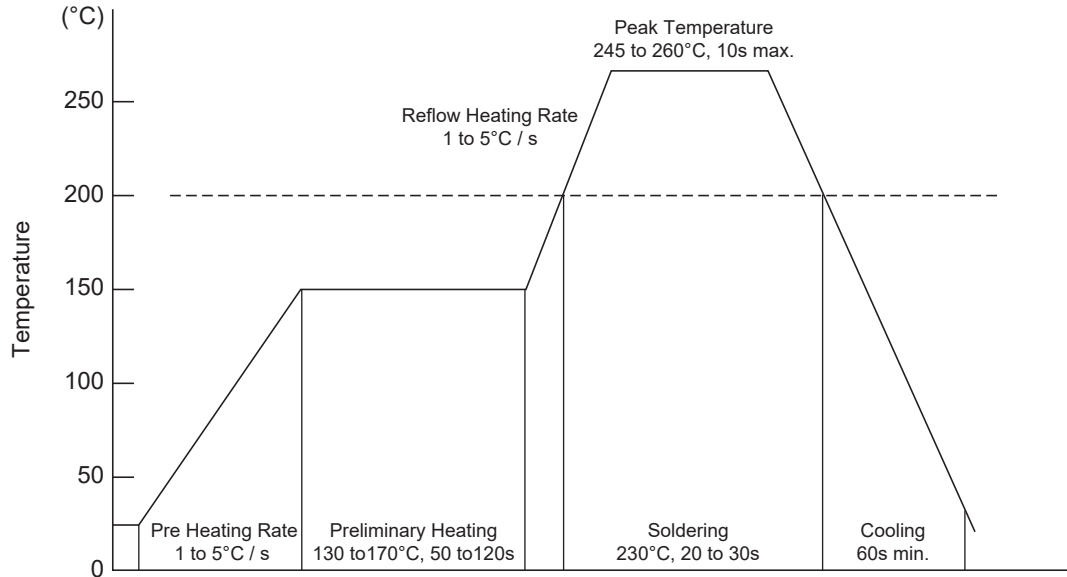

Recommended peak temperature is over 245°C. If peak temperature is below 245°C, you may adjust the following parameters:

- Time length of peak temperature (longer)
- Time length of soldering (longer)
- Thickness of solder paste (thicker)

◆ Conditions of hand soldering


- Temperature: 300°C
- Time: 3s max.
- Times: one time

◆ Storage conditions


- **Temperature**
5 to 40°C
- **Humidity**
30 to 80% RH
- **Recommended period**
One year after manufacturing

Package Specifications

- The method of packaging

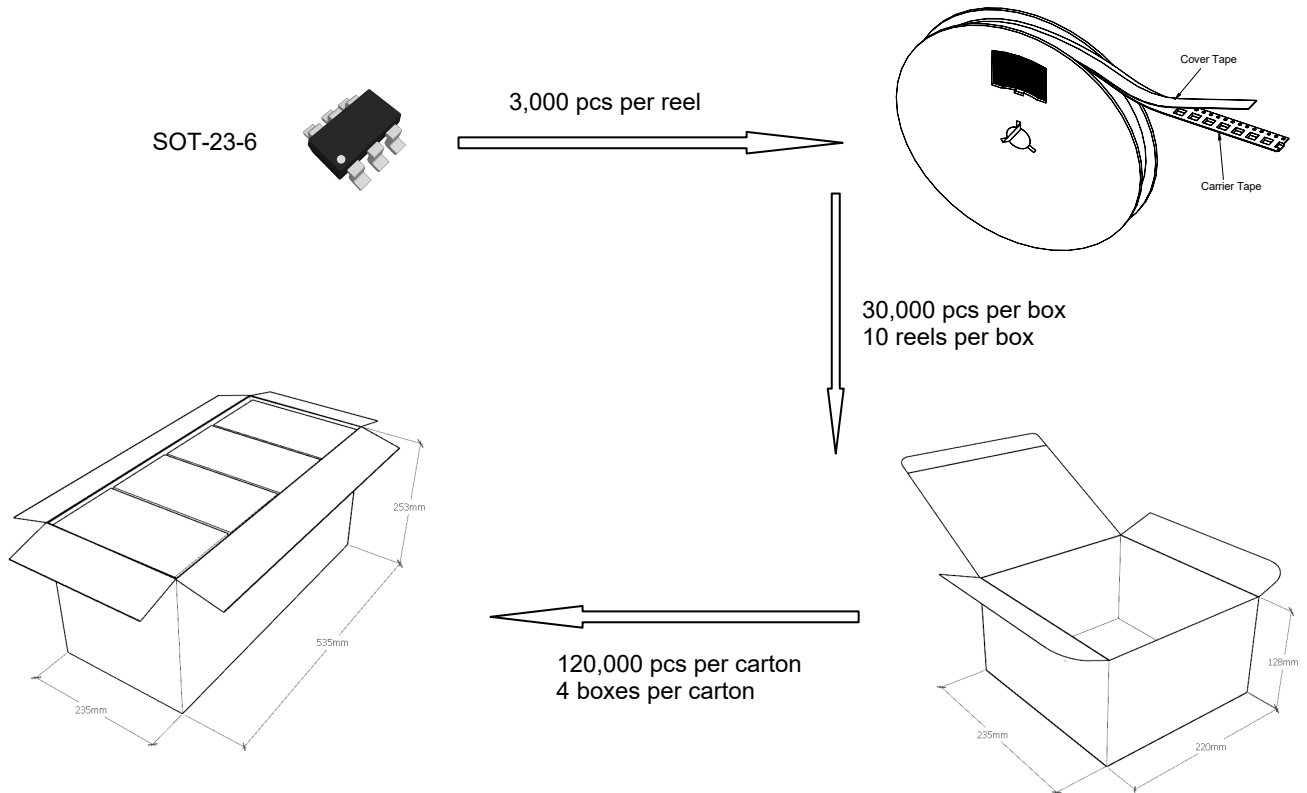


◆ Embossed tape and reel data

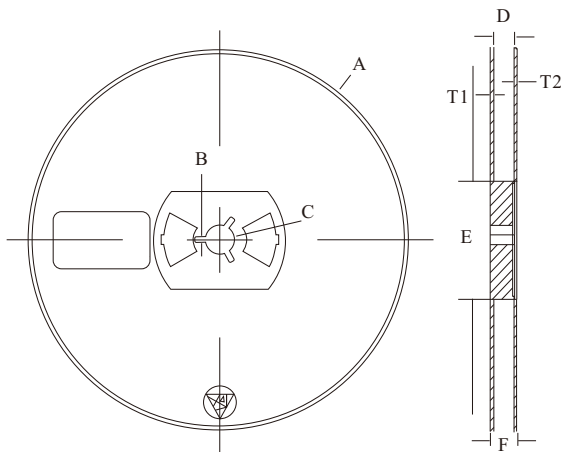

| Symbol | Value (unit: mm) |
|--------|------------------|
| A | Ø 177.8±1 |
| B | 2.7±0.2 |
| C | Ø 13.5±0.2 |
| E | Ø 54.5±0.2 |
| F | 12.3±0.3 |
| D | 9.6+2/-0.3 |
| T1 | 1.0±0.2 |
| T2 | 1.2±0.2 |

Reel (7")

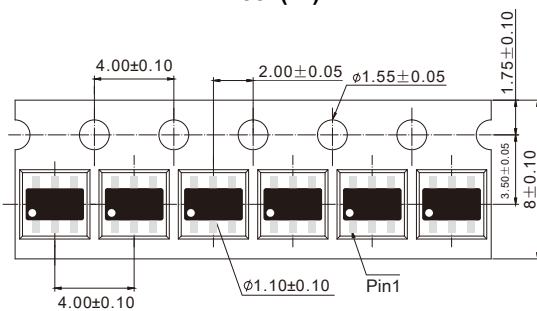

Tape (8mm)