



PJMG30P60TE

P-Channel Enhancement Mode Power MOSFET

Product Summary

- $V_{DS} = -60V, I_D = -30A$
- $R_{DS(on)} < 50m\Omega @ V_{GS} = -10V$
- $R_{DS(on)} < 65m\Omega @ V_{GS} = -4.5V$


Features

- Advanced Split Gate Trench Technology
- 100% Avalanche Tested
- RoHS Compliant
- Halogen and Antimony Free
- Moisture Sensitivity Level 3


Application

- DC-DC converter
- Portable Equipment
- Power Management

Marking Code




TO-252



(Top View)

Pin	Description
1	Gate
2	Drain
3	Source

Schematic Diagram



Absolute Maximum Ratings

Ratings at 25°C case temperature unless otherwise specified.

Parameter	Symbol	Value	Unit
Drain-Source Voltage	$-V_{DS}$	60	V
Gate-Source Voltage	V_{GS}	± 20	V
Drain Current-Continuous	$-I_D$	30	A
Drain Current-Pulsed ^{Note1}	$-I_{DM}$	100	A
Maximum Power Dissipation	P_D	72	W
Single pulse avalanche energy ^{Note2}	E_{AS}	12.25	mJ
Junction Temperature	T_J	150	°C
Storage Temperature Range	T_{STG}	-55 to +150	°C

Thermal Characteristics

Thermal Resistance, Junction-to-Case	$R_{\theta JC}$	1.74	°C/W
--------------------------------------	-----------------	------	------



PJMG30P60TE

P-Channel Enhancement Mode Power MOSFET

Electrical Characteristics

(T_j=25°C unless otherwise specified)

Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Static Characteristics						
Drain-Source Breakdown Voltage	-V _{(BR)DSS}	V _{GS} =0V, I _D =-250μA	60	--	--	V
Zero Gate Voltage Drain Current	-I _{DSS}	V _{DS} =-60V, V _{GS} =0V	--	--	1	μA
Gate-Body Leakage Current	I _{GSS}	V _{GS} =±20V, V _{DS} =0V	--	--	±100	nA
Gate Threshold Voltage ^{Note3}	-V _{GS(th)}	V _{DS} =V _{GS} , I _D =-250μA	1	1.8	2.5	V
Drain-Source On-Resistance ^{Note3}	R _{DS(on)}	V _{GS} =-10V, I _D =-20A	--	35	50	mΩ
		V _{GS} =-4.5V, I _D =-10A	--	43	65	mΩ
Forward Transconductance ^{Note3}	g _{FS}	V _{DS} =-5V, I _D =-2A	--	6.8	--	S
Dynamic Characteristics						
Input Capacitance	C _{iss}	V _{DS} =-15V, V _{GS} =0V, f=1MHz	--	840	--	pF
Output Capacitance	C _{oss}		--	274	--	pF
Reverse Transfer Capacitance	C _{rss}		--	21	--	pF
Gate Resistance	R _g	V _{DS} =0V, V _{GS} =0V, f=1MHz	--	6.5	--	Ω
Total Gate Charge	Q _g	V _{DS} =-30V, I _D =-20A, V _{GS} =-10V	--	18.7	--	nC
Gate-Source Charge	Q _{gs}		--	4.7	--	nC
Gate-Drain Charge	Q _{gd}		--	3	--	nC
Switching Characteristics						
Turn-on Delay Time	t _{d(on)}	V _{DD} =-30V, I _D =-12A, V _{GS} =-10V, R _{GEN} =6Ω	--	7.5	--	nS
Turn-on Rise Time	t _r		--	39.5	--	nS
Turn-off Delay Time	t _{d(off)}		--	43.6	--	nS
Turn-off Fall Time	t _f		--	55.1	--	nS
Source-Drain Diode Characteristics						
Diode Forward Voltage ^{Note3}	-V _{SD}	V _{GS} =0V, I _S =-20A	--	--	1.2	V
Diode Forward Current	-I _S		--	--	30	A

Note: 1. Repetitive Rating: Pulse width limited by maximum junction temperature.

2. EAS condition: T_j=25°C, V_{DD}=-15V, V_G=-10V, L=0.5mH, R_G=25Ω, I_{AS}=-7A.







3. Pulse Test: Pulse Width≤300μs, Duty Cycle≤0.5%.



PJMG30P60TE

P-Channel Enhancement Mode Power MOSFET



Typical Characteristic Curves

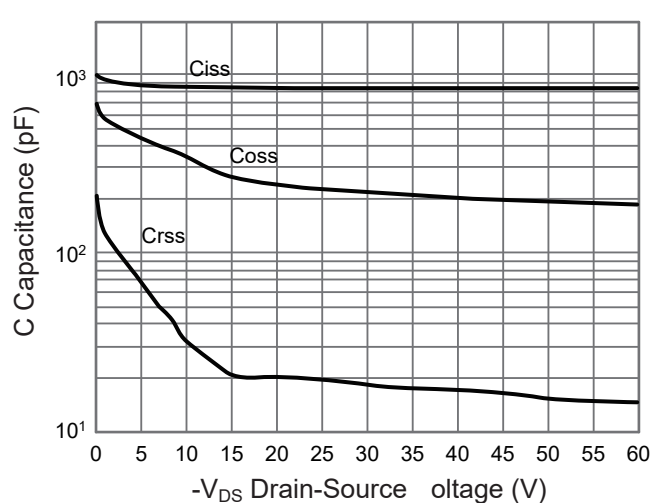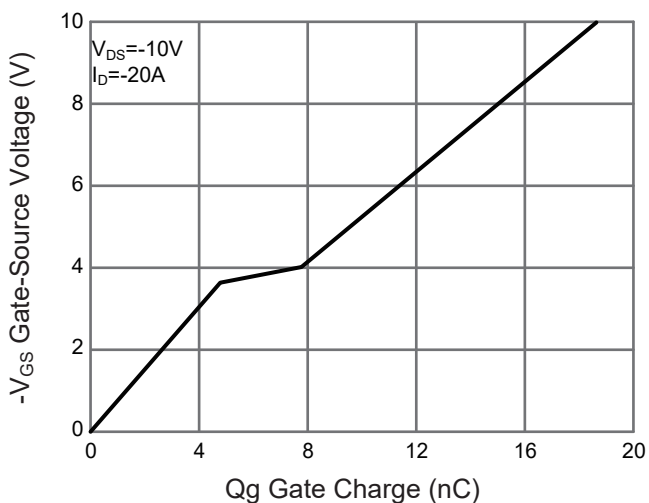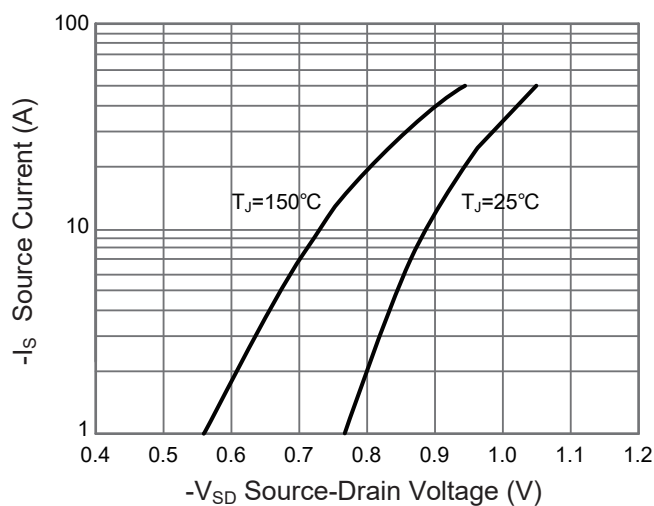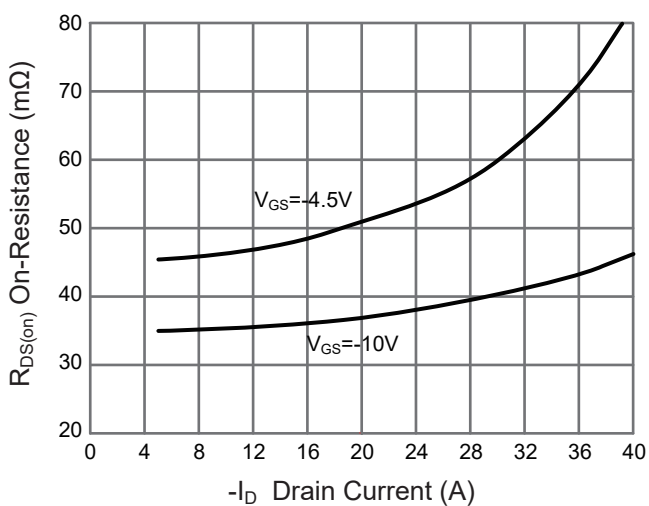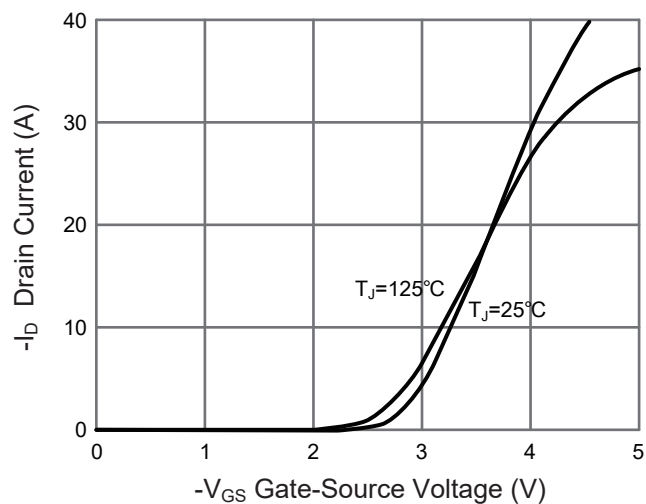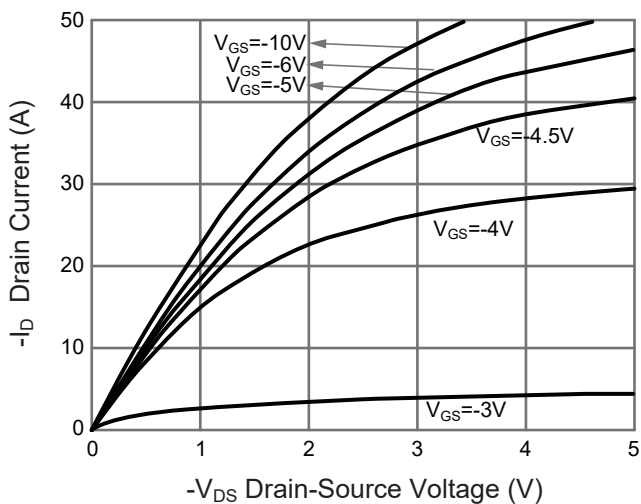



PJMG30P60TE

P-Channel Enhancement Mode Power MOSFET

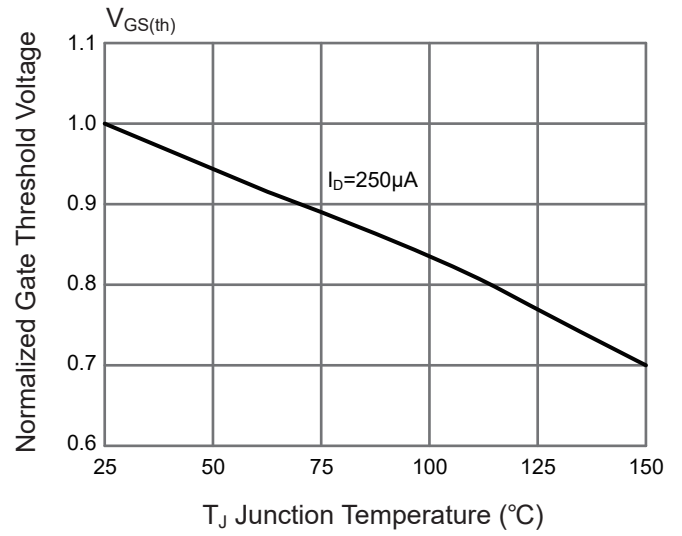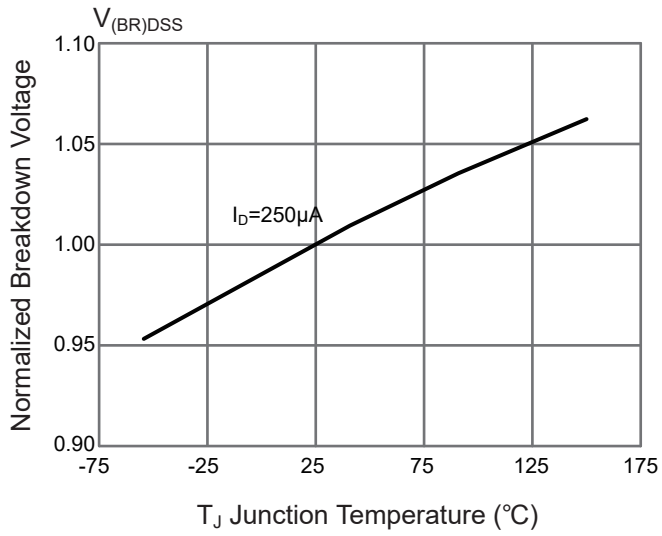




PJMG30P60TE

P-Channel Enhancement Mode Power MOSFET


Package Outline

TO-252


Dimensions in mm

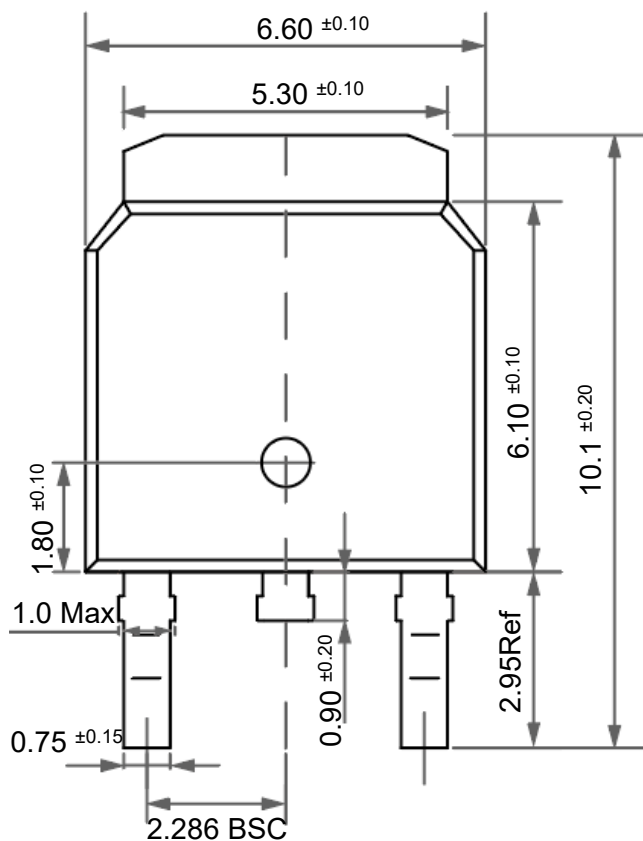

Front View

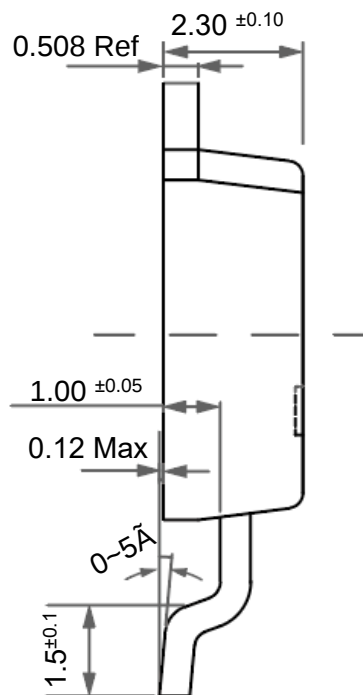

Side View

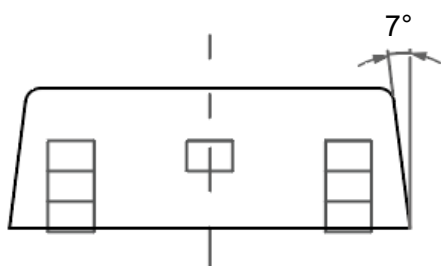

Bottom View


Ordering Information

Device	Package	Shipping
PJMG30P60TE	TO-252	2,500PCS/Reel&13inches



Conditions of Soldering and Storage

◆ Recommended condition of reflow soldering

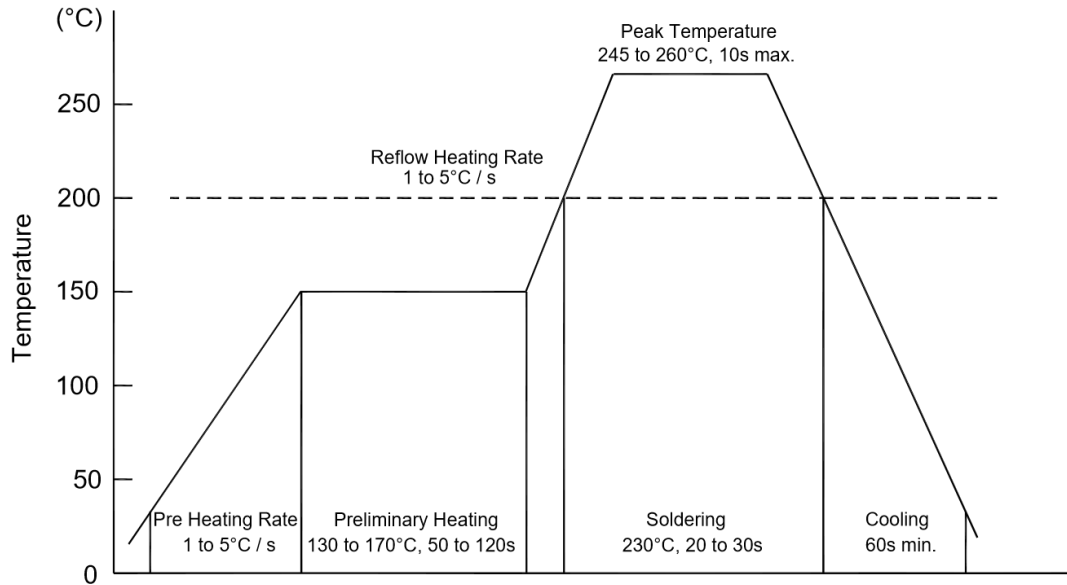

Recommended peak temperature is over 245°C. If peak temperature is below 245°C, you may adjust the following parameters:

- Time length of peak temperature (longer)
- Time length of soldering (longer)
- Thickness of solder paste (thicker)

◆ Conditions of hand soldering

- Temperature: 300°C
- Time: 3s max.
- Times: one time

◆ Storage conditions

- **Temperature**
5 to 40°C
- **Humidity**
30 to 80% RH
- **Recommended period**
One year after manufacturing




PJMG30P60TE


P-Channel Enhancement Mode Power MOSFET

Package Specifications

- The method of packaging

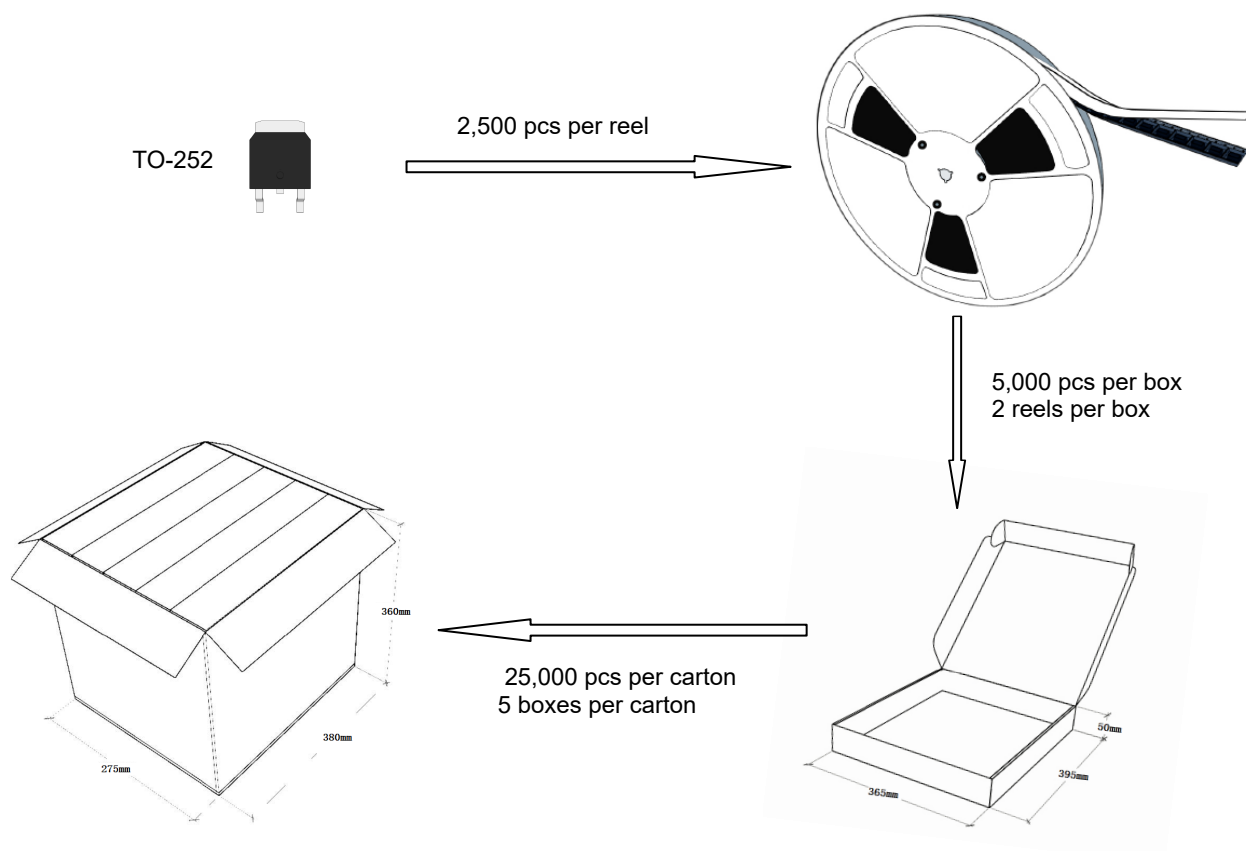

◆ reel data

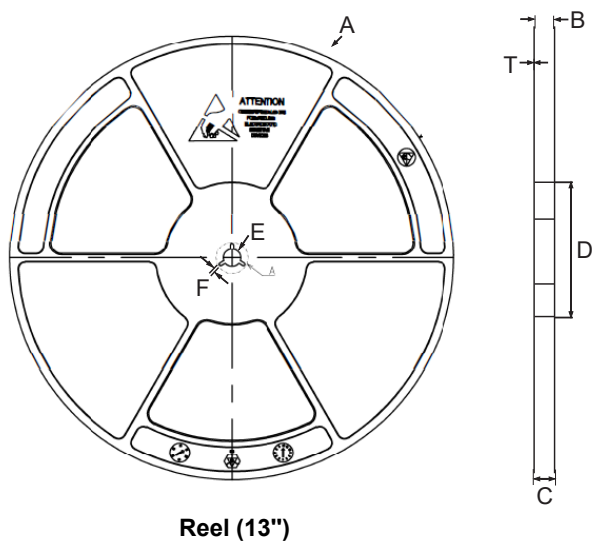

Symbol	Value(unit:mm)
A	$\Phi 330.2 \pm 1$
B	17 ± 0.5
C	21.2 ± 2
D	$\Phi 100 \pm 0.5$
E	$\Phi 13.4 \pm 0.2$
F	2.3 ± 0.2
T	2.1 ± 0.2



PJMG30P60TE

P-Channel Enhancement Mode Power MOSFET

◆ Embossed tape data

